

20W – Coaxial Attenuator

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.
- ◆ Military, space and commercial applications.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Freq. Range	Power	Attenuation Value	Attenuation Tolerance	VSWR Max	Connector Type	Impedance
UIYCA20AN3A1	DC-3GHz	20W	1 dB	±0.5 dB	1.2	N-M / N-F	50 Ω
UIYCA20AN3A2		20W	2 dB	±0.5 dB	1.2	N-M / N-F	50 Ω
UIYCA20AN3A3		20W	3 dB	±0.5 dB	1.2	N-M / N-F	50 Ω
UIYCA20AN3A5		20W	5 dB	±0.5 dB	1.2	N-M / N-F	50 Ω
UIYCA20AN3A6		20W	6 dB	±0.5 dB	1.2	N-M / N-F	50 Ω
UIYCA20AN3A10		20W	10 dB	±0.6 dB	1.2	N-M / N-F	50 Ω
UIYCA20AN3A20		20W	20 dB	±0.8 dB	1.2	N-M / N-F	50 Ω
UIYCA20AN3A30		20W	30 dB	±0.8 dB	1.2	N-M / N-F	50 Ω
UIYCA20AN6A1	DC-6GHz	20W	1 dB	±0.6 dB	1.3	N-M / N-F	50 Ω
UIYCA20AN6A2		20W	2 dB	±0.6 dB	1.3	N-M / N-F	50 Ω
UIYCA20AN6A3		20W	3 dB	±0.6 dB	1.3	N-M / N-F	50 Ω
UIYCA20AN6A5		20W	5 dB	±0.8 dB	1.3	N-M / N-F	50 Ω
UIYCA20AN6A6		20W	6 dB	±0.8 dB	1.3	N-M / N-F	50 Ω
UIYCA20AN6A10		20W	10 dB	±1.0 dB	1.3	N-M / N-F	50 Ω
UIYCA20AN6A20		20W	20 dB	±1.5 dB	1.3	N-M / N-F	50 Ω
UIYCA20AN6A30		20W	30 dB	±1.5 dB	1.3	N-M / N-F	50 Ω

- ² Listed are specific frequency ranges and tailor-made ranges are available.
² Please provide the information below when inquiring and mark * is required.
 * 1. Power handling, Attenuation Value
 2. Connect type (SMA Male/ Female, N Male/ Female, etc.)
 3. Other special requests (VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

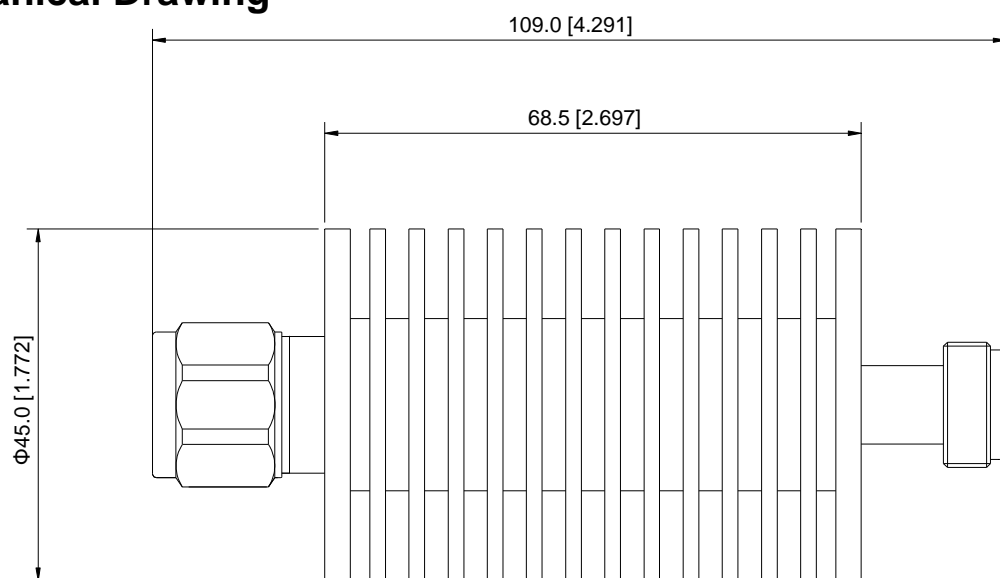

Unit: mm/ inch, General part tolerance is ±2% unless otherwise stated.

Ver. 5