

WR284 (BJ32) - Waveguide to Coaxial Adapter

Design Features

- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics


Model Number	Freq.Range (GHz)	Insertion Loss Max(dB)	VSWR Max	Connector Type (Waveguide)	Connector Type (Coaxial)	CW Power (W)	Peak Power (KW)	Temp.(°C)
UIYWTCWR284A26T395SF	2.6 ~ 3.95	0.15	1.15	WR284 (BJ32)	SMA-F	100	3	-55 ~ +85
UIYWTCWR284A26T395NF	2.6 ~ 3.95	0.15	1.15	WR284 (BJ32)	N-F	300	3	-55 ~ +85
UIYWTCWR284A26T395DF	2.6 ~ 3.95	0.15	1.15	WR284 (BJ32)	7/16-F	300	3	-55 ~ +85

² Listed are specific frequency ranges and other tailor-made ranges are available.

² Please provide the below information when inquiring and mark * is required.

- * 1. The specific frequency ranges.
- 2. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

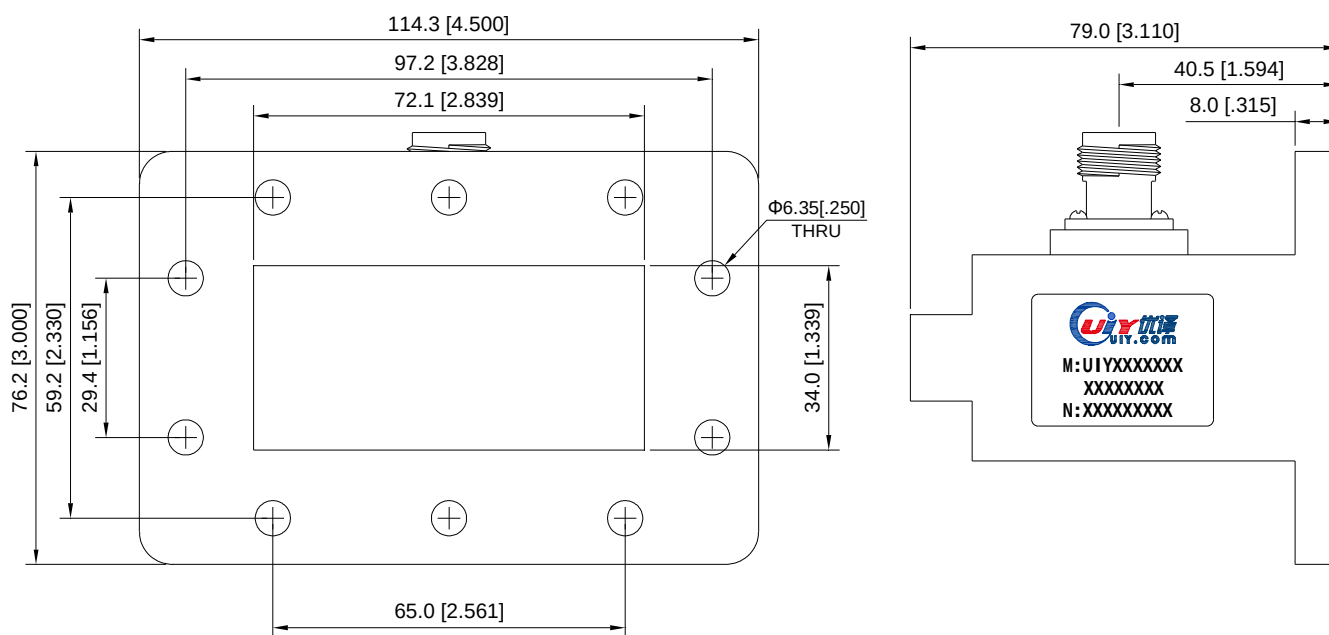

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5.2