

WR28 (BJ320) - Waveguide to Coaxial Adapter

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Freq.Range (GHz)	Insertion Loss Max(dB)	VSWR Max	Connector Type (Waveguide)	Connector Type (Coaxial)	CW Power (W)	Peak Power (W)	Temp.(°C)
UIYWTCWR28E265T40KF	26.5 ~ 40.0	0.25	1.25	WR28 (BJ320)	2.92mm-F	3	100	-55 ~ +85
UIYWTCWR28E265T40KM	26.5 ~ 40.0	0.25	1.25	WR28 (BJ320)	2.92mm-M	3	100	-55 ~ +85
UIYWTCWR28E265T4024F	26.5 ~ 40.0	0.25	1.25	WR28 (BJ320)	2.4mm-F	3	100	-55 ~ +85
UIYWTCWR28E265T4024M	26.5 ~ 40.0	0.25	1.25	WR28 (BJ320)	2.4mm-M	3	100	-55 ~ +85

- ² Listed are specific frequency ranges and other tailor-made ranges are available.
- ² Please provide the below information when inquiring and mark * is required.
- * 1. The specific frequency ranges.
 - 2. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

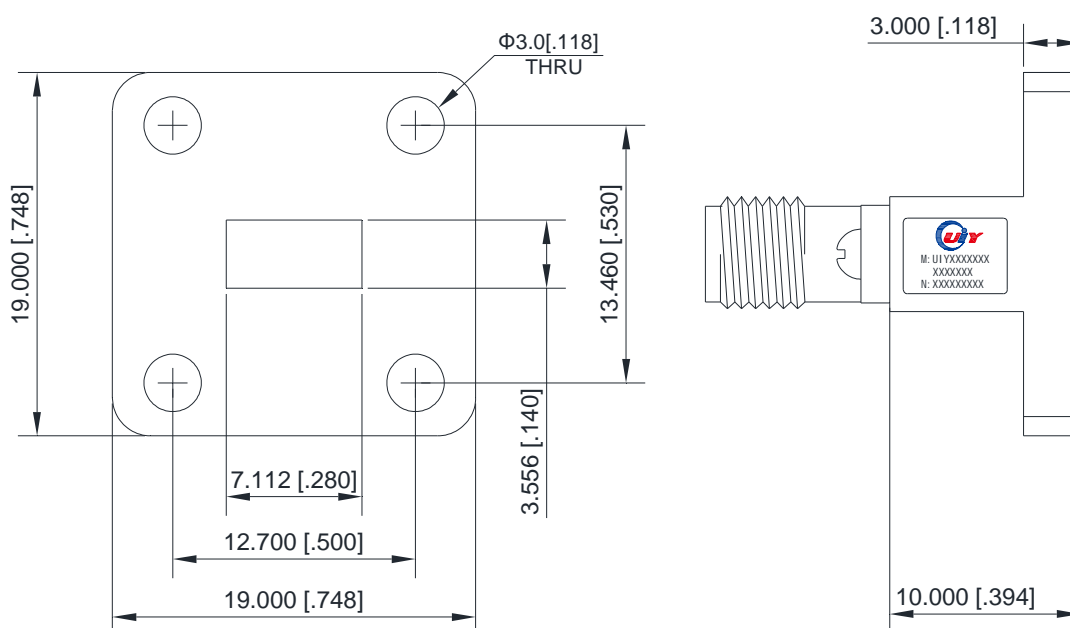

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5