

WR34 (BJ260) - Waveguide to Coaxial Adapter

Design Features

- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

RF Characteristics


Model Number	Freq.Range (GHz)	Insertion Loss Max(dB)	VSWR Max	Connector Type (Waveguide)	Connector Type (Coaxial)	CW Power (W)	Peak Power (W)	Temp.(°C)
UIYWTCWR34A217T33KF	21.7 ~ 33.0	0.25	1.2	WR34 (BJ260)	2.92mm-F	3	100	-55 ~ +85
UIYWTCWR34A217T33KM	21.7 ~ 33.0	0.25	1.2	WR34 (BJ260)	2.92mm-M	3	100	-55 ~ +85

² Listed are specific frequency ranges and other ranges are available.

² Please provide the below information when inquiring and mark * is required.

- * 1. The specific frequency range
- 2. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

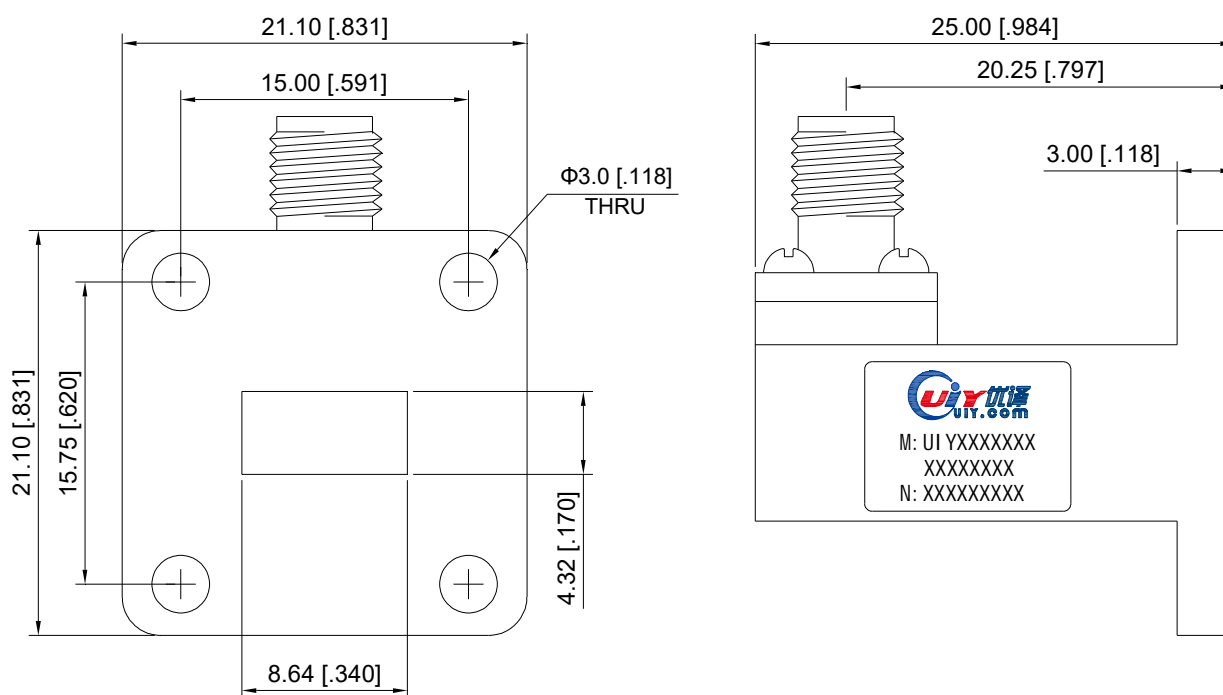

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5.3