

## 1350 to 1785MHz – Duplexer / Diplexer

### Design Features

- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

### RF Characteristics


Model Number	Freq. Range (MHz)		Isolation Min(dB)	Insertion Loss Max(dB)	Ripple in-band Max(dB)	VSWR Max	Power (W)	Connector Type	Temp.(°C)
UIYDX11880A1350T1785NF	CH1	1350~1518	60dB @ 1625~1785MHz 60dB @ 2700 ~ 4554MHz	1.0	0.5	1.4	50	N-F	-55 ~ +85
	CH2	1625~1785	60dB @ 1350~1518MHz 60dB @ 3250 ~ 5355MHz						
UIYDX11880A1350T1785SF	CH1	1350~1518	60dB @ 1625~1785MHz 60dB @ 2700 ~ 4554MHz	1.0	0.5	1.4	50	SMA-F	-55 ~ +85
	CH2	1625~1785	60dB @ 1350~1518MHz 60dB @ 3250 ~ 5355MHz						

<sup>2</sup> Listed are specific frequency ranges and tailor-made ranges are available.

<sup>2</sup> Please provide the information below when inquiring and mark \* is must.

- \* 1. The specific frequency range TX and RX
- \* 2. Insertion Loss, Isolation, VSWR
- \* 3. Other special requests (Power handling, Temperature, Dimension, etc.)

### Mechanical Drawing

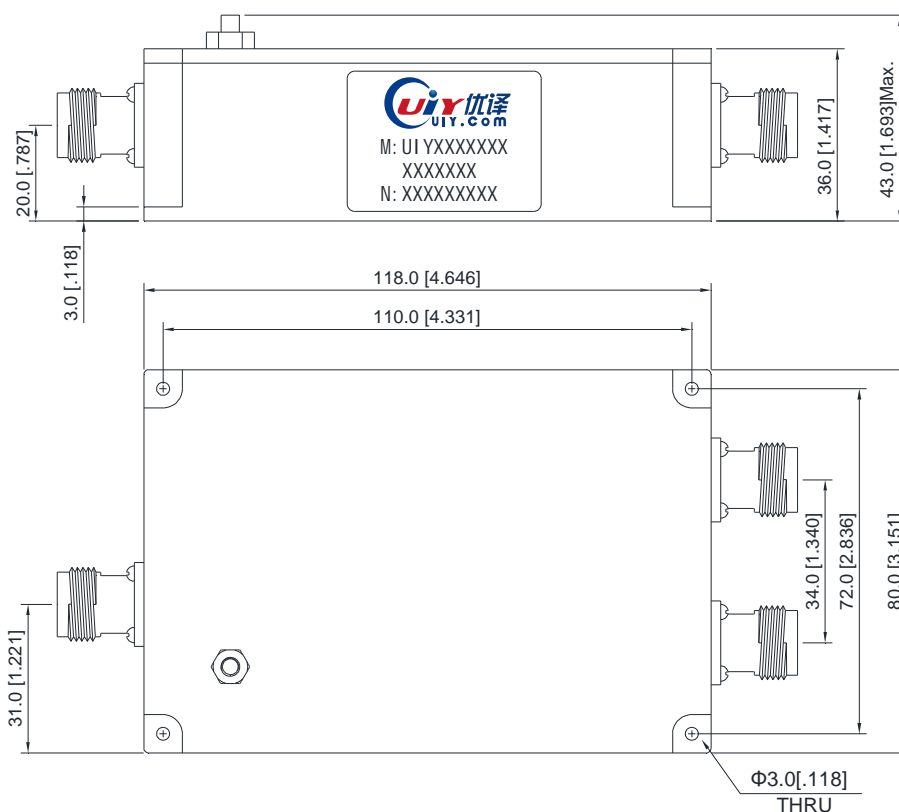

Unit: mm/ inch, General part tolerance is  $\pm 0.2$ mm unless otherwise stated.

Ver. 5.1