


800 to 1000MHz 120W – Power Amplifier UIYPA23688B800T1000SFTNF

RF Characteristics @T=25°C, VDD=+28VDC; 50Ω System					
Parameter	Symbol	Min	Type	Max	Unit
Operating Frequency	BW	800		1000	MHz
Power Output CW	Po	100	120		W
Saturation Output Power		150			
Power Gain @CW	G	48	50	53	dB
Input Power	Pin		0	5	dBm
Gain Flatness	ΔG		±1.0	±1.5	dB
Input VSWR	S11		1.5:1		
Odd Harmonics @CW	H	-50	-55		dBc
Even Harmonics @CW	H	-35	-37		dBc
Noise Figure	NF		6	8	dB
Spurious Signals	Spur		-60		dBc
Operating Voltage	VDC		28		Volt
Current Consumption @Po=120W	I _b		10	12	A
Operating Temperature	T _c	-40		+60	°C
Storage Temperature	T _{stg}	-55		+70	°C
Connector Type	Input SMA Female, Output N Female				
<ul style="list-style-type: none"> ◇ Listed are specific frequency ranges and other ranges are available. ◇ Please provide the below information when inquiring and mark * is required. <ul style="list-style-type: none"> * 1. The specific pass band frequency range * 2. The specific Gain and Power * 3. Other special requests. 					

Mechanical Drawing

Note: External heatsink is needed in this module

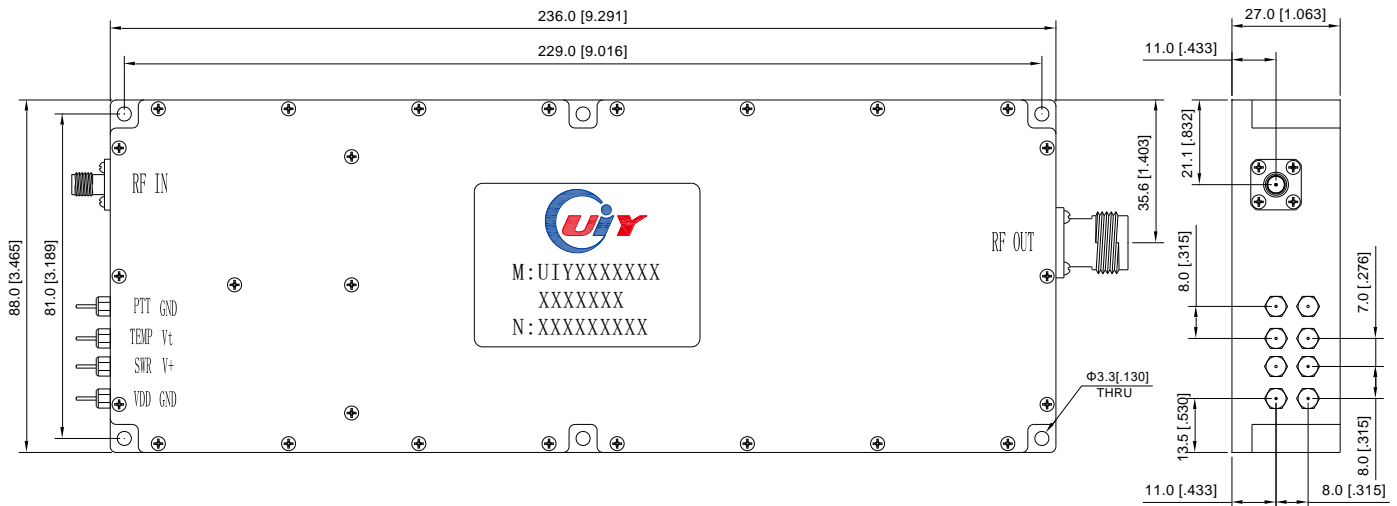

Unit: mm/ inch, General part tolerance is ±2% unless otherwise stated.

Ver. 5.1