


## 0.1 to 30MHz 1000W – Power Amplifier UIYPA450504A01T30SFT716F

RF Characteristics 50Ω System					
Parameter	Symbol	Min	Type	Max	Unit
Operating Frequency	BW	0.1		30	MHz
Power Output CW	Po		1000		W
Saturation Output Power		1000			
Power Gain @CW	G		60		dB
Input Power	Pin		0		dBm
Gain Flatness	ΔG		±1.5		dB
Input VSWR	S11		1.5:1		
Odd Harmonics @CW	H		-11		dBc
Even Harmonics @CW	H		-15		dBc
Noise Figure	NF				dB
Spurious Signals	Spur		-60		dBc
Operating Voltage	VDC		220		Volt
Operating Temperature	Tc	-20		+60	°C
Storage Temperature	Tstg	-40		+70	°C
Connector Type	SMA Female to 7/16 Female				
<p>◇ Listed are specific frequency ranges and other ranges are available.</p> <p>◇ Please provide the below information when inquiring and mark * is required.</p> <p>* 1. The specific pass band frequency range</p> <p>* 2. The specific Gain and Power</p> <p>3. Other special requests.</p>					

### Image

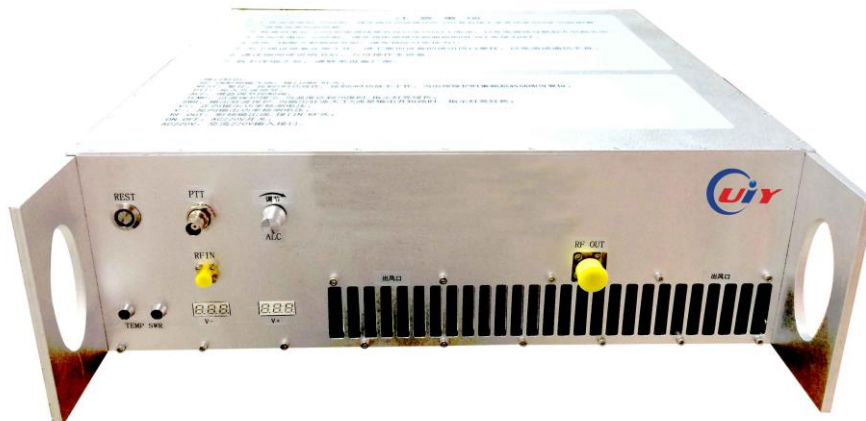

Unit: mm/ inch, General part tolerance is ±2% unless otherwise stated.

Ver. 5.1

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China.

Web: [www.uiy.com](http://www.uiy.com)

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

E-mail: [sales@uiy.com](mailto:sales@uiy.com)