

10 to 15GHz – Waveguide Isolator

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.
- ◆ Military, space and commercial applications.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Freq. Range (GHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYWI4444A10T12	10.0 ~ 12.0	0.3	23	1.2	100	30	WR75(BJ120)	-40 ~ +85
UIYWI4444A10T11	10.0 ~ 11.0	0.3	23	1.2	100	30	WR75(BJ120)	-40 ~ +85
UIYWI4444A107T1275	10.7 ~ 12.75	0.3	23	1.2	100	30	WR75(BJ120)	-40 ~ +85
UIYWI4444A11T124	11.0 ~ 12.4	0.35	20	1.2	100	30	WR75(BJ120)	-40 ~ +85
UIYWI4444A124T138	12.4 ~ 13.8	0.35	20	1.2	100	30	WR75(BJ120)	-40 ~ +85
UIYWI4444A1375T1425	13.75 ~ 14.25	0.3	23	1.2	100	30	WR75(BJ120)	-40 ~ +85
UIYWI4444A14T15	14.0 ~ 15.0	0.3	23	1.2	100	30	WR75(BJ120)	-40 ~ +85

- ² Listed are specific frequency ranges and tailor-made ranges are available.
- ² Please provide the information below when inquiring and mark * is required.
- * 1. The specific frequency ranges
 - * 2. Power handling (Forward, Reverse, Peak, etc.)
 - 3. Other special requests (Such as Insertion Loss, Isolation, VSWR, Temperature, Dimension etc.)

Mechanical Drawing

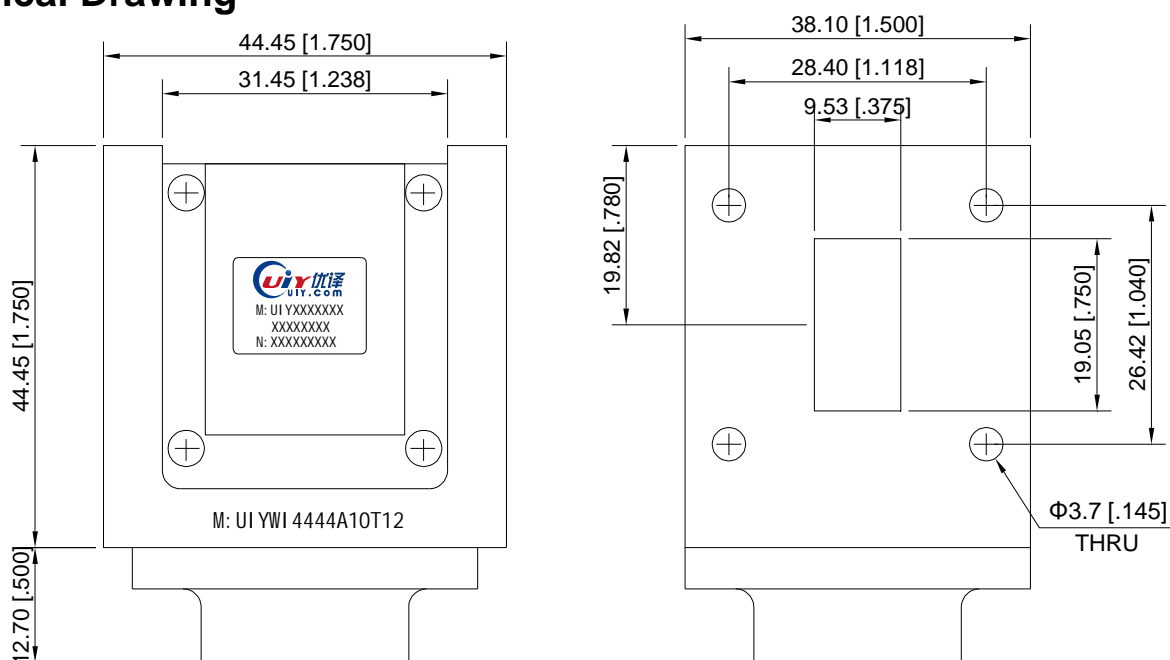

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5.1