

350 to 6000MHz – 2 Way Power Divider/Splitter

Design Features

- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Freq.Range (MHz)	Insertion Loss Max(dB)	Ripple Max(dB)	Isolation Min(dB)	VSWR Input Max	Phase Unbalance	Amplitude Unbalance	Power (W)		Connector Type	Temp.(°C)
								Forward	Reverse		
UIY2PD4273A 350T6000SF	350~6000	1.8 (Split 3dB)	1.2	16	1.5	±5°	±0.4dB	25	1	SMA-F	-55~+85


² Listed are specific frequency ranges and other ranges are available by custom.

² Please provide the below information when inquiring and mark * is required.

* 1. The specific frequency ranges.

2. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

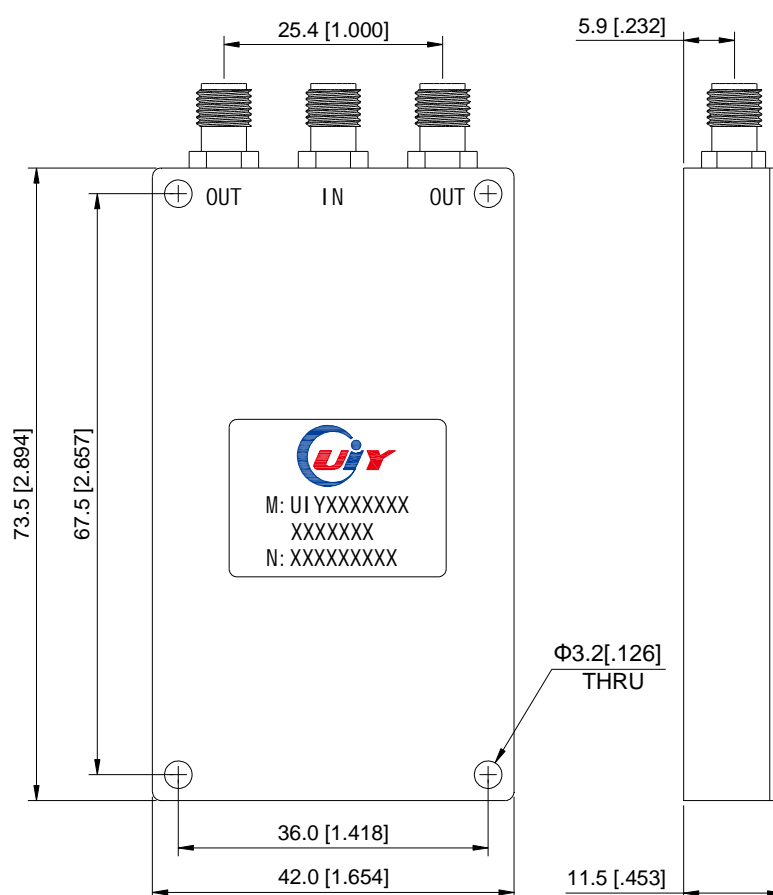

Unit: mm/ inch, General part tolerance is ±2% unless otherwise stated.

Ver. 5