

## 6 to 18GHz – Coaxial Circulator

### Design Features

- ◆ Can be dual junction even three for high isolation.
- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

### RF Characteristics


Model Number	Freq. Range (GHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYBCC1920A6T18SMTSFTSF	6.0 ~ 18.0	1.5	10	1.9	60	60	SMA-M to SMA-F to SMA-F	-30 ~ +70
UIYBCC1920A6T18SF	6.0 ~ 18.0	1.5	10	1.9	60	60	SMA-F	-30 ~ +70

<sup>2</sup> List are specify frequency range and other ranges available.

<sup>2</sup> Please enter below information when inquiry and mark \* is must.

- \* 1. The specific frequency range
- \* 2. Power handling (Forward, Reverse, Peak, etc.)
- \* 3. Connect type (SMA Male/ Female, N Male/ Female, etc.)
- 4. Other special request if have (Insertion Loss, Isolation, VSWR, Temperature, Dimension, etc.)

### Mechanical Drawing

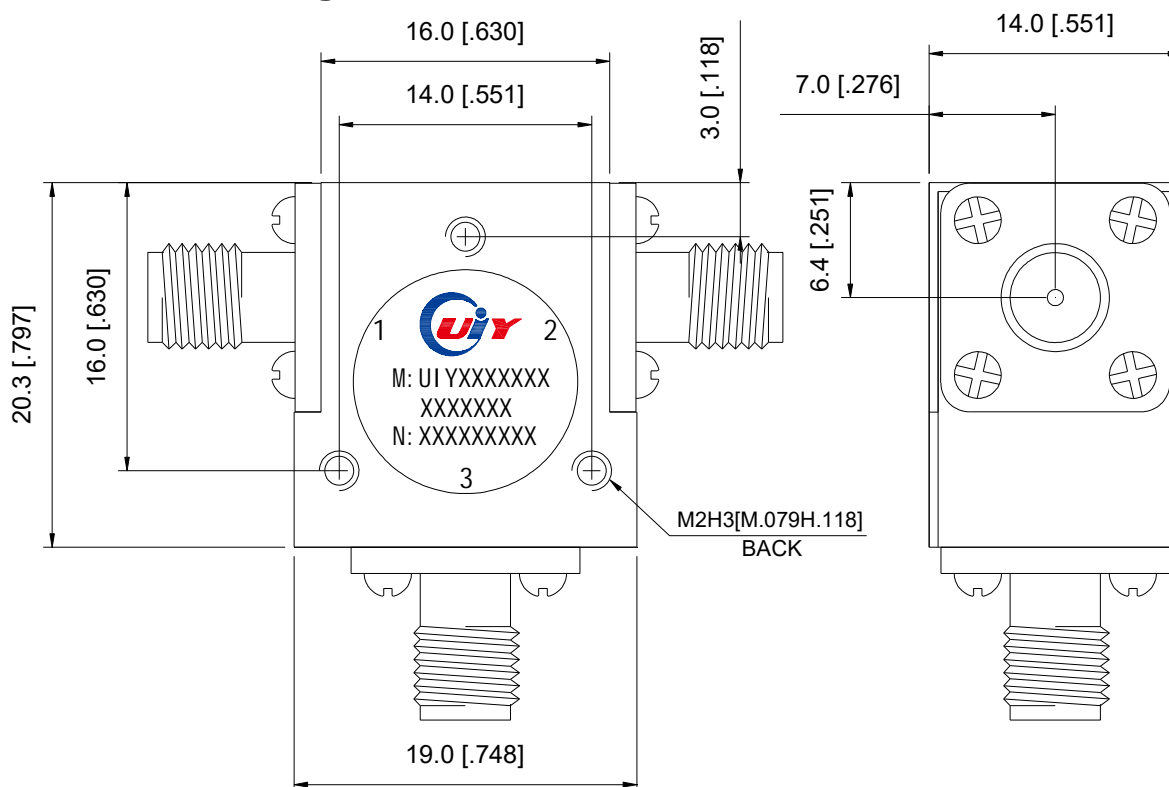

Unit: mm/ inch, General part tolerance is  $\pm 2\%$  unless otherwise stated.

Ver. 5