

## 2 to 6GHz – Coaxial Circulator

### Design Features

- ◆ Can be dual junction or multiple for high isolation.
- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

### RF Characteristics

Model Number	Freq. Range (GHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYBCC3030A2T6SF	2.0 ~ 6.0	0.8	13	1.5	100	100	SMA-F	+20 ~ +70
		1.5@2.0~2.5GHz 0.8@2.5~6.0GHz	13	1.5				-40 ~ +20
UIYBCC3030A2T6NF	2.0 ~ 6.0	0.8	13	1.5	100	100	N-F	+20 ~ +70
		1.5@2.0~2.5GHz 0.8@2.5~6.0GHz	13	1.5				-40 ~ +20

<sup>2</sup> Listed are specific frequency ranges and tailor-made ranges are available.

<sup>2</sup> Please provide the information below when inquiring and mark \* is required.


\* 1. The specific frequency ranges

\* 2. Power handling (Forward, Reverse, Peak, etc.)

\* 3. Connect type (SMA Male/ Female, N Male/ Female, etc.)

4. Other special request if have (Insertion Loss, Isolation, VSWR, Temperature, Dimension, etc.)

### Mechanical Drawing

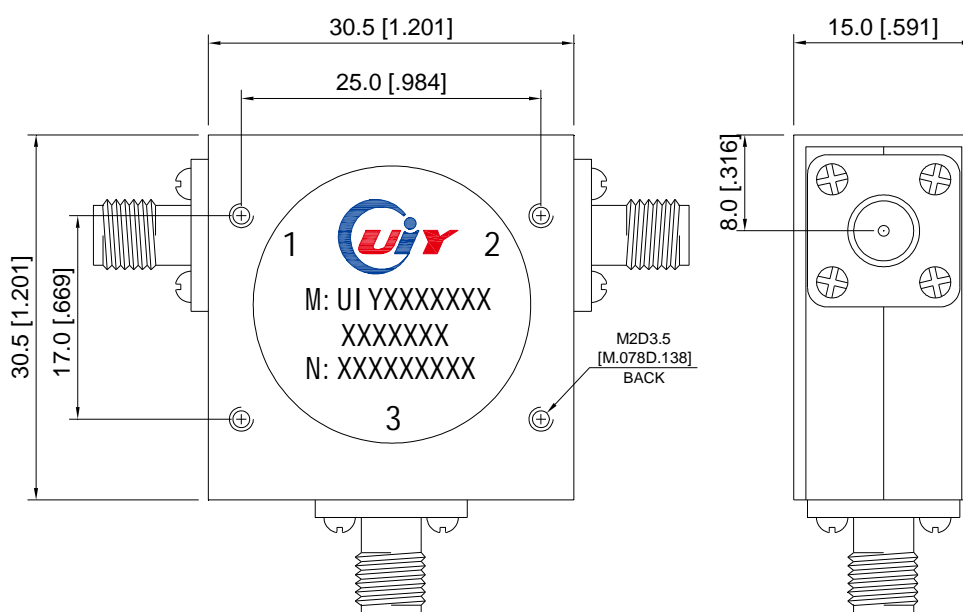

Unit: mm/ inch, General part tolerance is  $\pm 2\%$  unless otherwise stated.

Ver. 5.3