

## 1.7 to 3.5GHz – Coaxial Circulator

### Design Features


- ◆ Can be dual junction even three for high isolation.
- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

### RF Characteristics

Model Number	Freq. Range (GHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYBCC4040A17T35SF	1.7 ~ 3.5	0.7	17	1.4	100	100	SMA-F	0 ~ +70
UIYBCC4040A17T35NF	1.7 ~ 3.5	0.7	17	1.4	100	100	N-F	0 ~ +70

- <sup>2</sup> List are specify frequency range and other ranges available.  
<sup>2</sup> Please enter below information when inquiry and mark \* is must.
- \* 1. The specific frequency range
  - \* 2. Power handling (Forward, Reverse, Peak, etc.)
  - \* 3. Connect type (SMA Male/ Female, N Male/ Female, etc.)
  - 4. Other special request if have (Insertion Loss, Isolation, VSWR, Temperature, Dimension, etc.)

### Mechanical Drawing

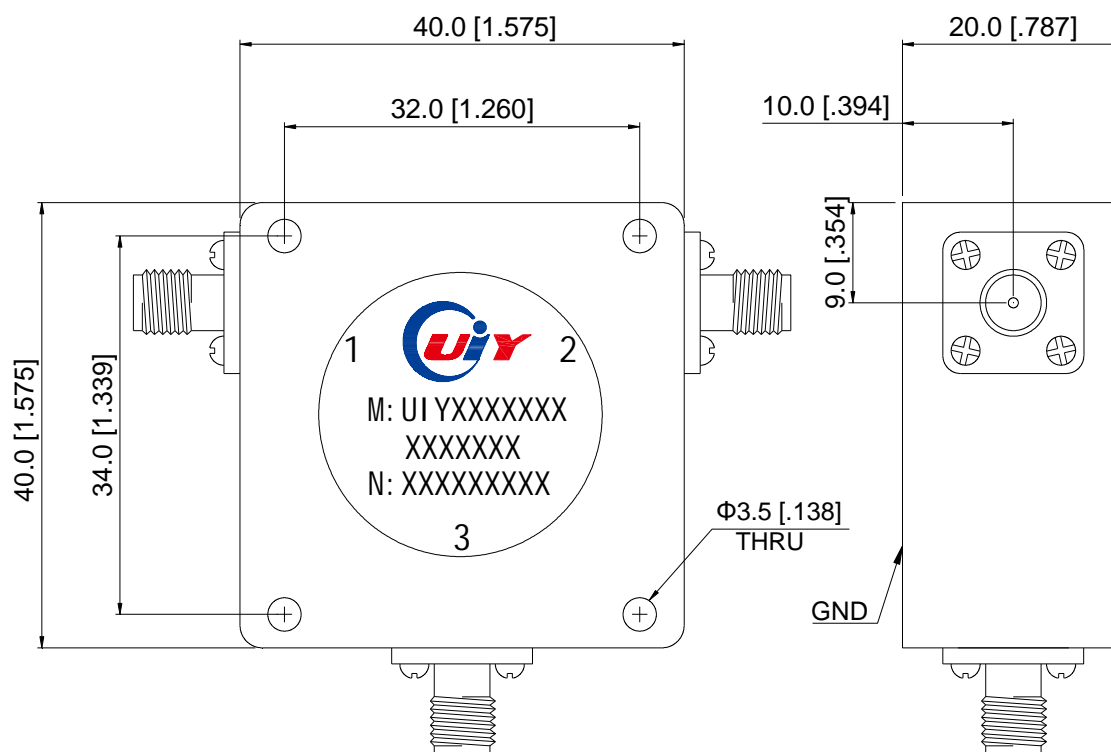

Unit: mm/ inch, General part tolerance is  $\pm 2\%$  unless otherwise stated.

Ver. 5