

8 to 12GHz – Dual Junction Coaxial Isolator

Design Features

- ◆ Can be dual junction or multiple for high isolation.
- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

| Model Number | Freq. Range (GHz) | Insertion Loss Max(dB) | Isolation Min(dB) | VSWR Max | Forward Power(W) | Reverse Power(W) | Connector Type | Temp.(°C) |
|----------------------|-------------------|------------------------|-------------------|----------|------------------|------------------|----------------|-----------|
| UIYBCI2618A8T12SF | 8.0 ~ 12.0 | 1.0 | 36 | 1.3 | 60 | 10 | SMA-F | -55 ~ +85 |
| UIYBCI2618A8T12SMTSF | 8.0 ~ 12.0 | 1.0 | 36 | 1.3 | 60 | 10 | SMA-M to SMA-F | -55 ~ +85 |
| UIYBCI2618A8T12SFTSM | 8.0 ~ 12.0 | 1.0 | 36 | 1.3 | 60 | 10 | SMA-F to SMA-M | -55 ~ +85 |

² Listed are specific frequency ranges and tailor-made ranges are available.

² Please provide the information below when inquiring and mark * is required.


* 1. The specific frequency ranges

* 2. Power handling (Forward, Reverse, Peak, etc.)

* 3. Connect type (SMA Male/ Female, N Male/ Female, etc.)

4. Other special request if have (Insertion Loss, Isolation, VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

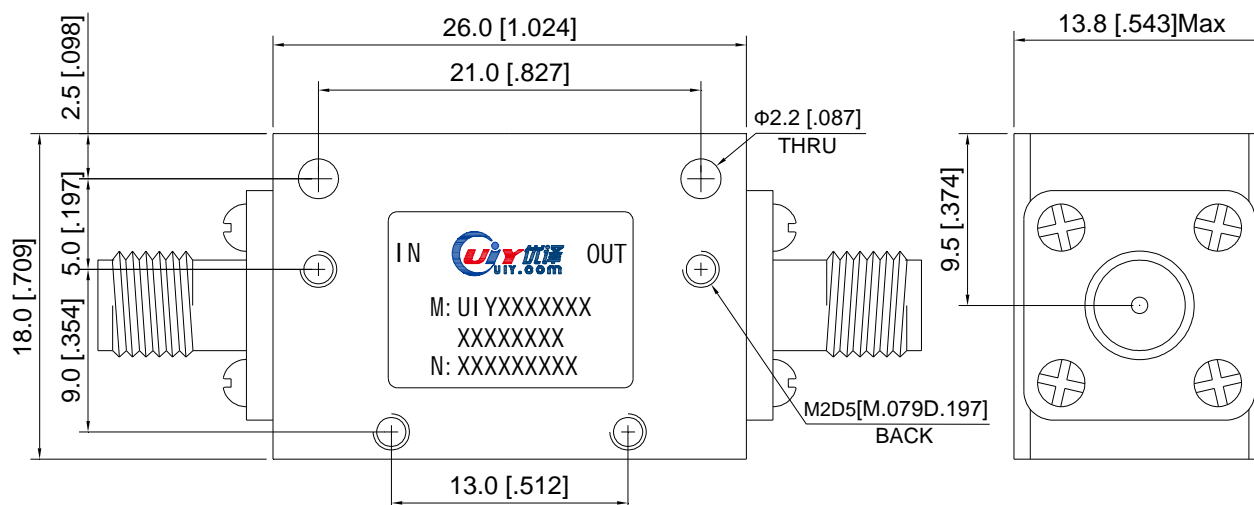

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China.

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

Web: www.uiy.com

E-mail: sales@uiy.com