

1 to 2GHz – Dual Junction Drop in Circulator

Design Features


- ◆ Can be dual junction even three for high isolation.
- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

RF Characteristics

| Model Number | Freq. Range (GHz) | Insertion Loss (1-2) Max(dB) | Isolation (2-1) Min(dB) | VSWR Max | Forward Power(W) | Reverse Power(W) | Connector Type | Temp.(°C) |
|-----------------|-------------------|------------------------------|-------------------------|----------|------------------|------------------|----------------|-----------|
| UIYBDC14272A1T2 | 1.0 ~ 2.0 | 1.4 | 32 | 1.4 | 300 | 300 | TAB | +10 ~ +70 |

- ² List are specify frequency range and other ranges available.
² Please enter below information when inquiry and mark * is must.
- * 1. The specific frequency range
 - * 2. Power handling (Forward, Reverse, Peak, etc.)
 - * 3. Connect type (SMA Male/ Female, N Male/ Female, etc.)
 - 4. Other special request if have (Insertion Loss, Isolation, VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

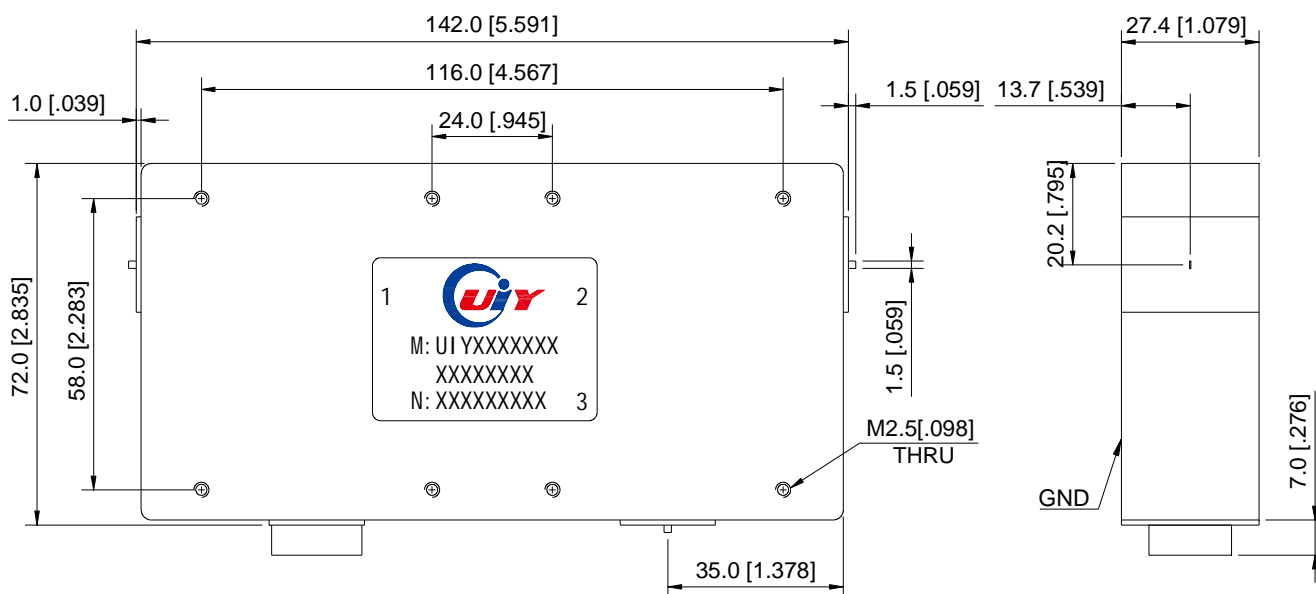

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5