# 56 to 86MHz – Drop in Circulator

## Design Features

- Can be dual junction even three for high isolation.
- Military, space and commercial applications.
- Custom design available upon request.
- Guaranteed for one year standard.

## RF Characteristics

| Model Number | Freq. Range (MHz) | Insertion Loss Max(dB) | Isolation Min(dB) | VSWR Max | Forward Power(W) | Reverse Power(W) | Connector Type | Temp.(℃) |
|---|---|---|---|---|---|---|---|---|
| UIYBDC6060E56T86 | 56 ~ 86 | 1.5 | 16 | 1.4 | 60 | 60 | TAB | -10 ~ +65 |

- List are specify frequency range and other ranges available.
- Please enter below information when inquiry and mark * is must.
  - * 1. The specific frequency range
  - * 2. Power handling (Forward, Reverse, Peak, etc.)
  - * 3. Connect type (SMA Male/ Female, N Male/ Female, etc.)

## Mechanical Drawing

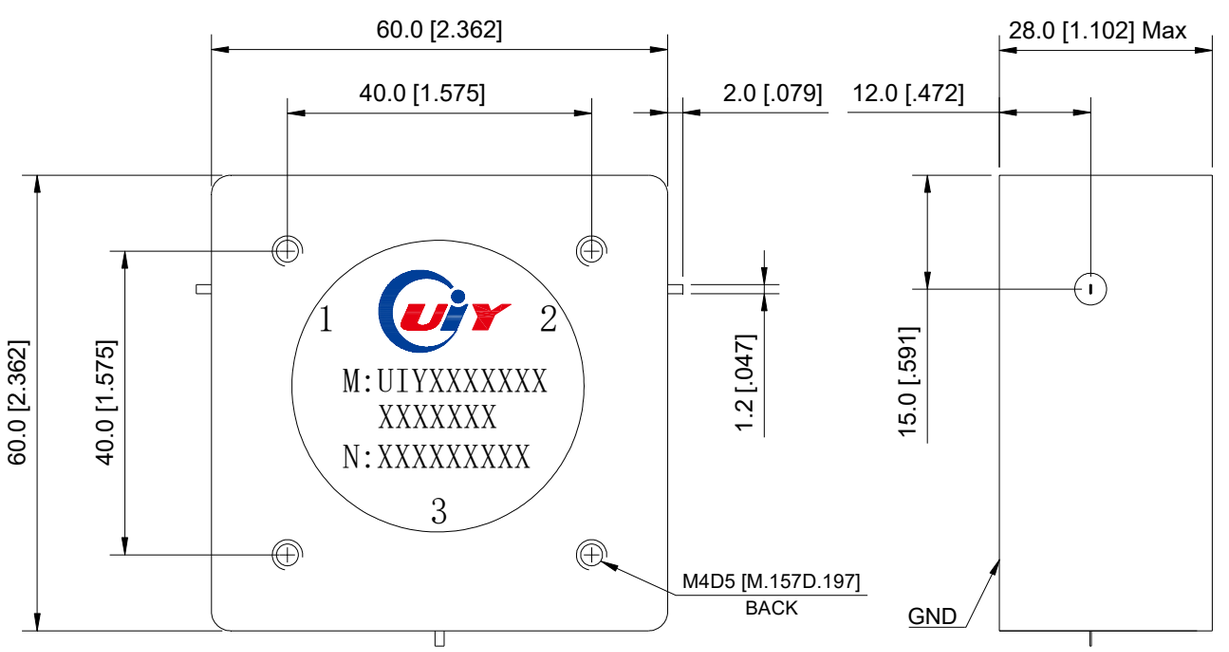


Unit: mm/ inch, General part tolerance is ±2% unless otherwise stated.

Ver. 5

3/F, No 9, Xiangyin Rd, Longgang District, Shenzhen 518116, China. Web: www.uiy.com
Tel: +86-755-25999990 +86-755-25999909 Fax: +86-755-25999959 E-mail: sales@uiy.com