

## 0.8 to 2.0GHz – Drop in Circulator

### Design Features


- ◆ Can be dual junction even three for high isolation.
- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

### RF Characteristics

Model Number	Freq. Range (GHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYBDC7272A08T2	0.8 ~ 2.0	1.3	13	1.6	300	300	TAB	+10 ~ +70

- 2 List are specify frequency range and other ranges available.  
 2 Please enter below information when inquiry and mark \* is must.  
 \* 1. The specific frequency range  
 \* 2. Power handling (Forward, Reverse, Peak, etc.)  
 3. Other special request if have (Insertion Loss, Isolation, VSWR, Temperature, Dimension, etc.)

### Mechanical Drawing

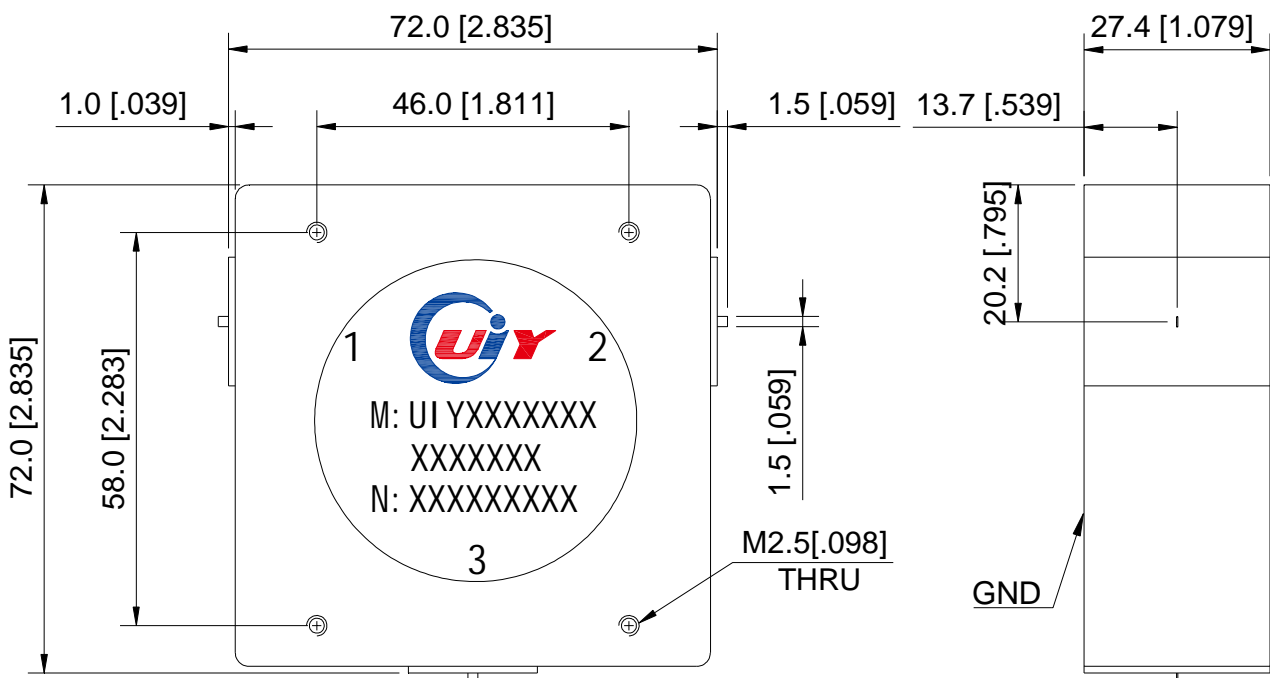

Unit: mm/ inch, General part tolerance is  $\pm 0.2$ mm unless otherwise stated.

Ver. 5