

## 713 to 748MHz – Band Pass Filter

### Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

### RF Characteristics

Model Number	Pass Band (MHz)	Insertion Loss Max(dB)	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYBPF10673F713T748NF	713 ~ 748	1.5	1.5	50dB @650~702MHz	100	N-F	-40 ~ +85
UIYBPF10673F713T748716F	713 ~ 748	1.5	1.5	50dB @650~702MHz	100	7/16-F	-40 ~ +85
UIYBPF10673F713T748SF	713 ~ 748	1.5	1.5	50dB @650~702MHz	100	SMA-F	-40 ~ +85

- 2 Listed are specific frequency ranges and other ranges are available.
- 2 Please provide the below information when inquiring and mark \* is required.
- \* 1. The specific pass band frequency range
- \* 2. The specific rejection and frequency
3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

### Mechanical Drawing

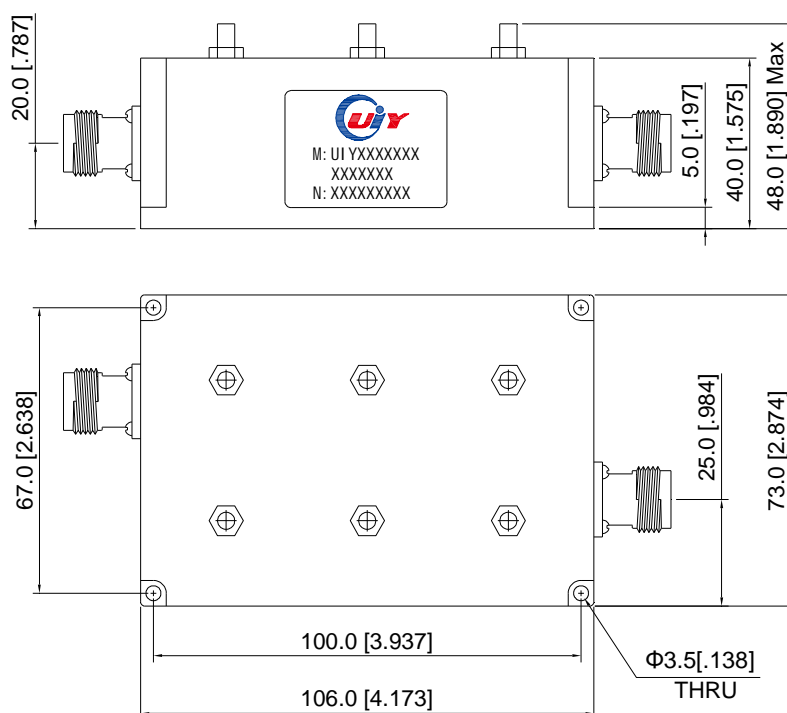

Unit: mm/ inch, General part tolerance is  $\pm 2\%$  unless otherwise stated.

Ver. 5