

Design Features

- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

RF Characteristics

Model Number	Pass Band (MHz)	Insertion Loss Max(dB)	Ripple in-band Max(dB)	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYBPF11579A470T488NF	470 ~ 488	2.0	1.0	1.5	40dB @F0±25MHz	100	N-F	-30 ~ +70


² Please provide the below information when inquiring and mark * is required.

- * 1. The specific pass band frequency range.

1. The specific pass band frequency range.
- * 2. The specific rejection and frequency.

3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

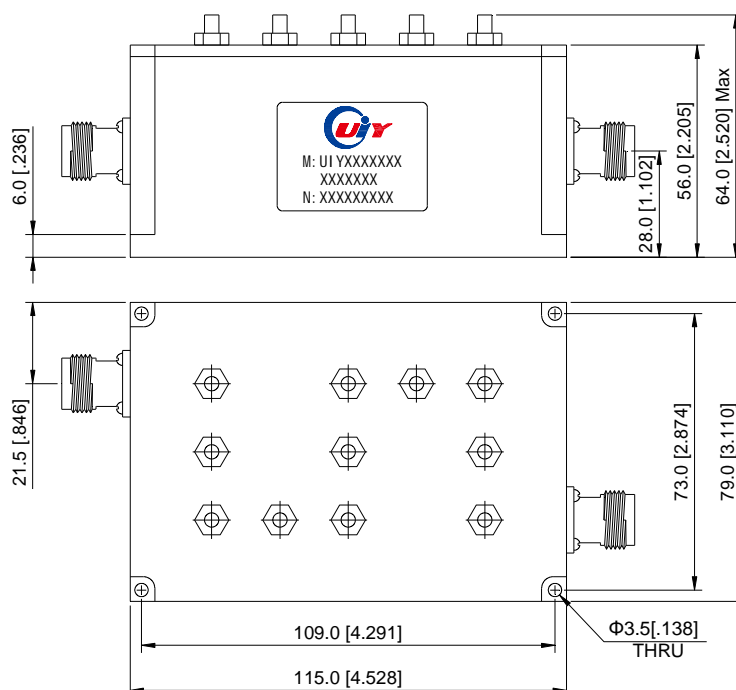

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5