

980 to 1260MHz – Band Pass Filter

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Pass Band (MHz)	Insertion Loss Max(dB)	Ripple Max(dB)	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYBPF12073A980T1260SF	980 ~ 1260	0.8	0.5	1.3	20dB@DC~950MHz 20dB@1290~3000MHz	20	SMA-F	-40 ~ +85
UIYBPF12073A980T1260NF	980 ~ 1260	0.8	0.5	1.3	20dB@DC~950MHz 20dB@1290~3000MHz	20	N-F	-40 ~ +85

- ² Listed are specific frequency ranges and tailor-made ranges are available.
- ² Please provide the below information when inquiring and mark * is required.
- * 1. The specific pass band frequency range
 - * 2. The specific rejection and frequency
 - 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

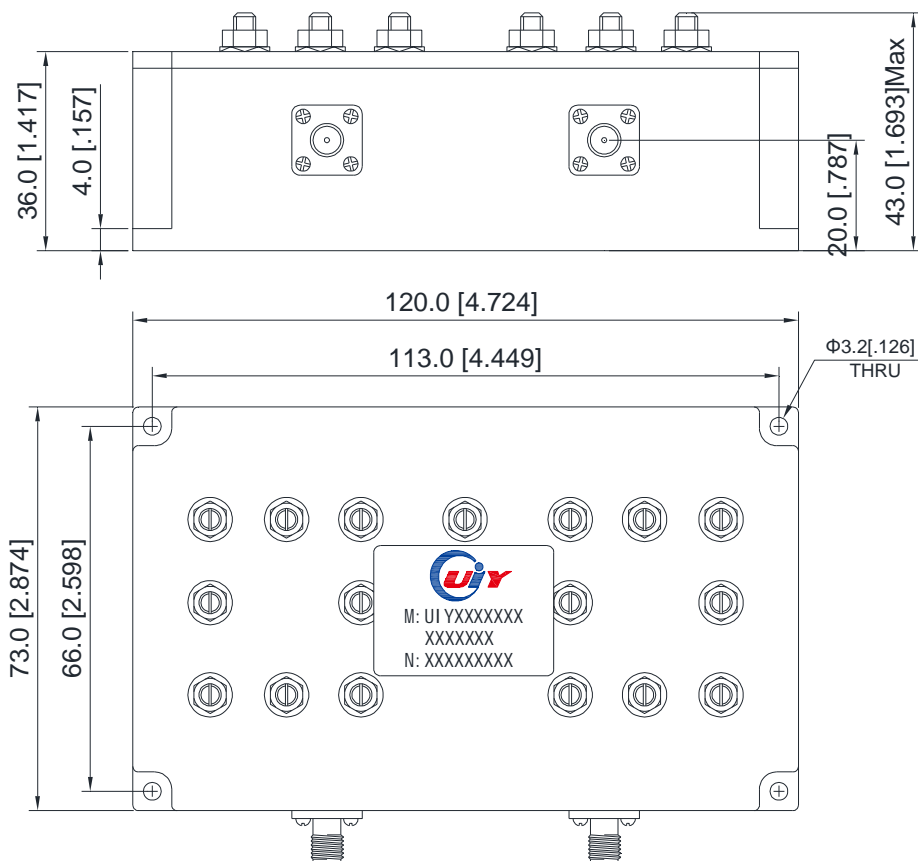

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5