

1350 to 1400MHz – Band Pass Filter

Design Features

- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Pass Band (MHz)	Insertion Loss Max(dB)	Ripple Max(dB)	Return loss Min(dB)	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYPBF12080A1350T1400SF	1350 ~ 1400	0.5	0.2	20	60dB @DC~1310MHz 60dB @1440~2400MHz	10	SMA-F	-40 ~ +85
UIYPBF12080A1350T1400NF	1350 ~ 1400	0.5	0.2	20	60dB @DC~1310MHz 60dB @1440~2400MHz	10	N-F	-40 ~ +85

² Listed are specific frequency ranges and tailor-made ranges are available.


² Please provide the below information when inquiring and mark * is required.

* 1. The specific pass band frequency range

* 2. The specific rejection and frequency

3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

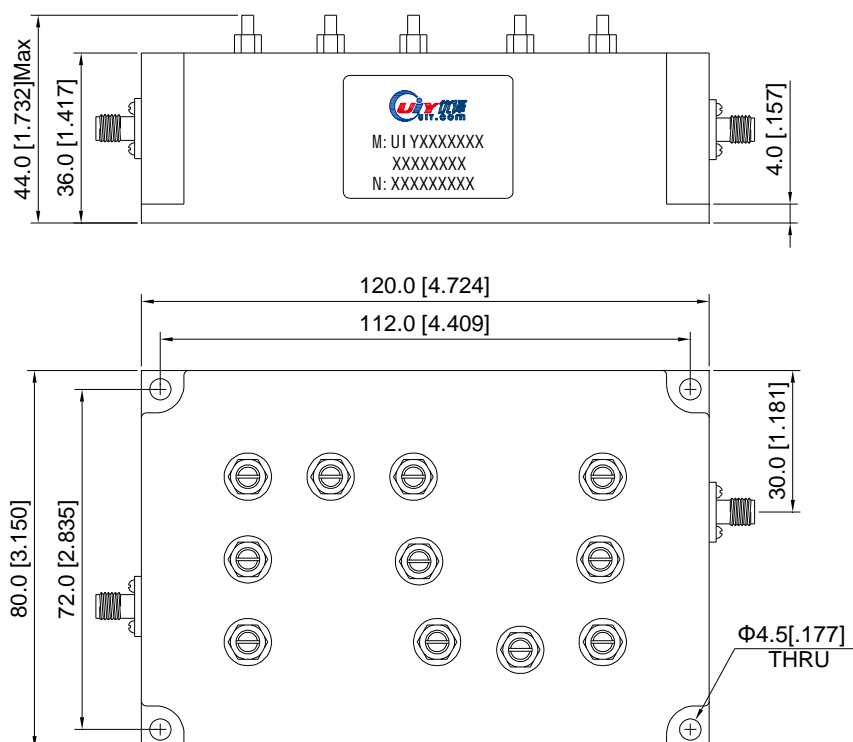

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China.

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

Web: www.uiy.com

E-mail: sales@uiy.com