

240 to 320MHz – Band Pass Filter

Design Features

- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

RF Characteristics

Model Number	Pass Band (MHz)	Insertion Loss Max(dB)	Ripple	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYBPF220115A240T270NF	240 ~ 270	1.0	0.8	1.3	80dB @220MHz 80dB @290MHz	100	N-F	-30 ~ +70
UIYBPF220115A240T270SF	240 ~ 270	1.0	0.8	1.3	80dB @220MHz 80dB @290MHz	100	SMA-F	-30 ~ +70
UIYBPF220115A290T320NF	290 ~ 320	1.0	0.6	1.3	100dB @270MHz	100	N-F	-30 ~ +70
UIYBPF220115A290T320SF	290 ~ 320	1.0	0.6	1.3	100dB @270MHz	100	SMA-F	-30 ~ +70

² Listed are specific frequency ranges and other ranges are available.


² Please provide the below information when inquiring and mark * is required.

* 1. The specific pass band frequency range

* 2. The specific rejection and frequency

3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

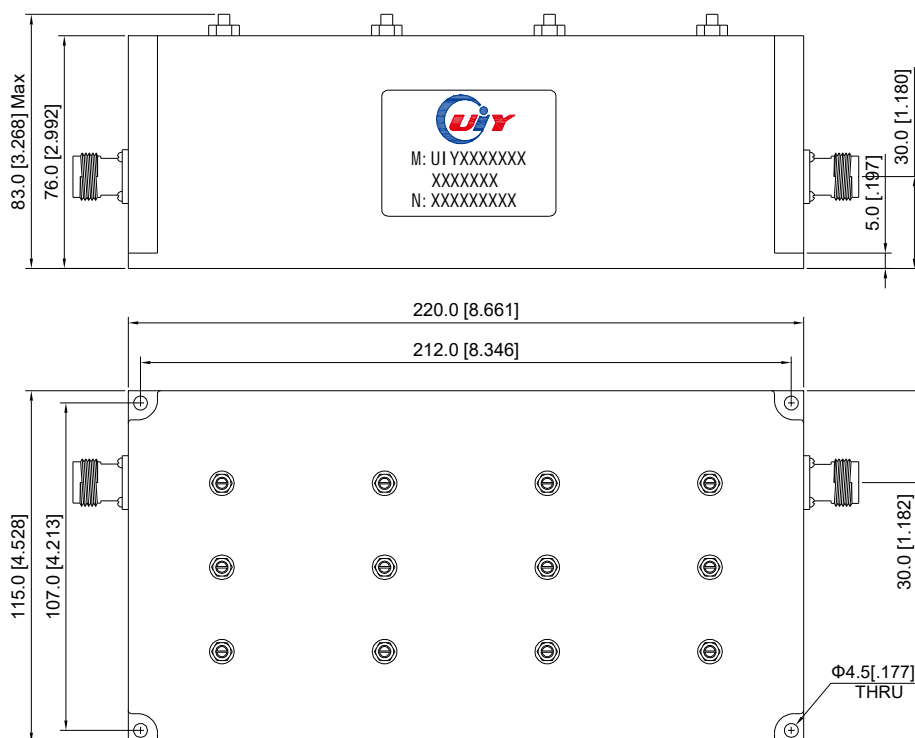

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5

3/F, Building A5, Shenbao Power Industrial Park, Shenzhen 518116, China.

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

Web: www.uiy.com

E-mail: sales@uiy.com