

94 to 95MHz – Band Pass Filter

Design Features

- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics


Model Number	Pass Band (MHz)	Insertion Loss Max(dB)	Ripple Max(dB)	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYBPF269288A94T95SF	94.0 ~ 95.0	1.2	0.6	1.3	40dB @DC~88MHz 40dB @105 ~ 500MHz	10	SMA-F	-25 ~ +60
UIYBPF269288A94T95NF	94.0 ~ 95.0	1.2	0.6	1.3	40dB @DC~88MHz 40dB @105 ~ 500MHz	10	N-F	-25 ~ +60

² Listed are specific frequency ranges and tailor-made ranges are available.

² Please provide the below information when inquiring and mark * is required.

- * 1. The specific pass band frequency range
- * 2. The specific rejection and frequency
- 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

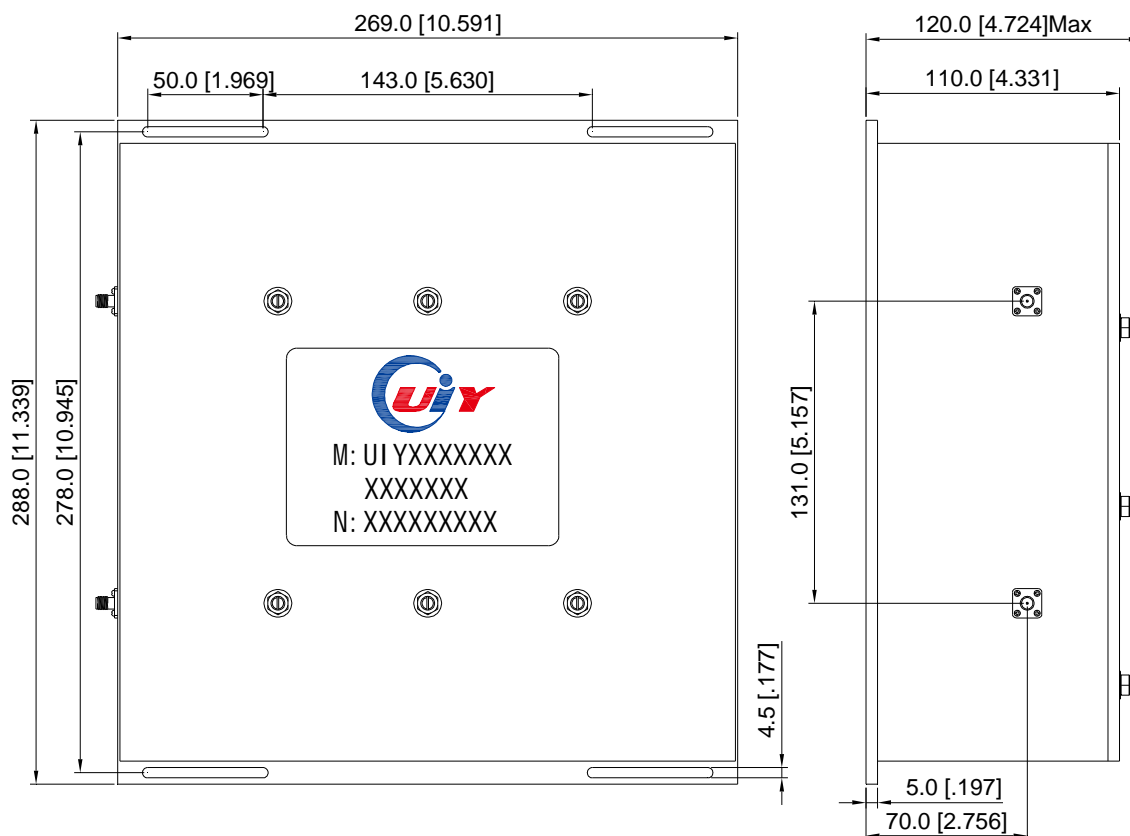

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5.0