



20 to 24GHz - Band Pass Filter

Design Features

- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- Custom design available upon request.
- Support one year standard warranty.


RF Characteristics

Model Number	Pass Band (GHz)	Insertion Loss Max(dB)	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYBPF3314A20T24KF	20.0 ~ 24.0	2.0	1.8	55dB@DC~15.0GHz 55dB@29.0~38.0GHz	10	2.92mm-F	-40 ~ +70

- Listed are specific frequency ranges and other tailor-made ranges are available.
- Please provide the below information when inquiring and mark * is required.
 - * 1. The specific pass band frequency range.
 - * 2. The specific rejection and frequency.
 - 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

S

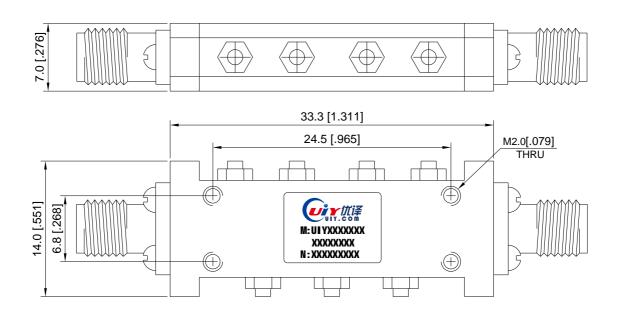

Unit: mm/ inch, General part tolerance is ±2% unless otherwise stated.

Ver. 5.0

Web: www.uiy.com

E-mail: sales@uiy.com

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China. Tel: +86-755-83748888 +86-755-25999990 Fax: +86-755-25999959