



30 to 33GHz – Band Pass Filter

Design Features


- High RF performance, ultra-competitive price.
- Military, space and commercial applications.
- Custom design available upon request.
- Support one year standard warranty.

RF Characteristics

Model Number	Pass Band (GHz)	Insertion Loss Max(dB)	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYBPF3513A30T33KF	30.0 ~ 33.0	2.0	1.8	55dB@DC~25.0GHz 55dB@38.0~40.0GHz	10	2.92mm-F	-40 ~ +70
 Listed are specific frequency ranges and other tailor-made ranges are available. Please provide the below information when inquiring and mark * is required. * 1. The specific pass band frequency range. 							

- * 2. The specific rejection and frequency.
 - 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

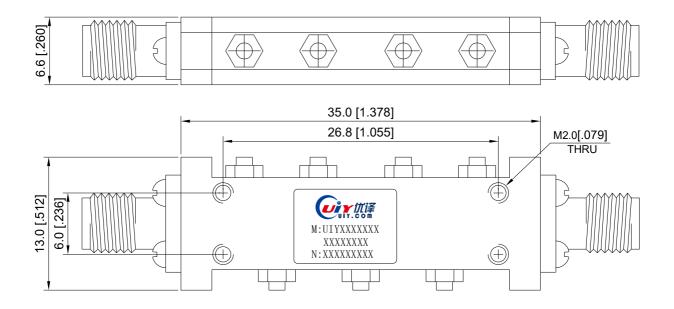

Unit: mm/ inch, General part tolerance is ±2% unless otherwise stated.