

## 3300 to 5000MHz – Band Pass Filter

### Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

### RF Characteristics

Model Number	Pass Band (MHz)	Insertion Loss Max(dB)	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYBPF4025A3300T5000SF	3300 ~ 5000	1.0	1.5	45dB @6600-10000MHz 45dB @DC-2000MHz	50	SMA-F	-40 ~ +85

- 2 Listed are specific frequency ranges and other ranges are available.
- 2 Please provide the below information when inquiring and mark \* is required.
- \* 1. The specific pass band frequency range
  - \* 2. The specific rejection and frequency
  - 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

### Mechanical Drawing

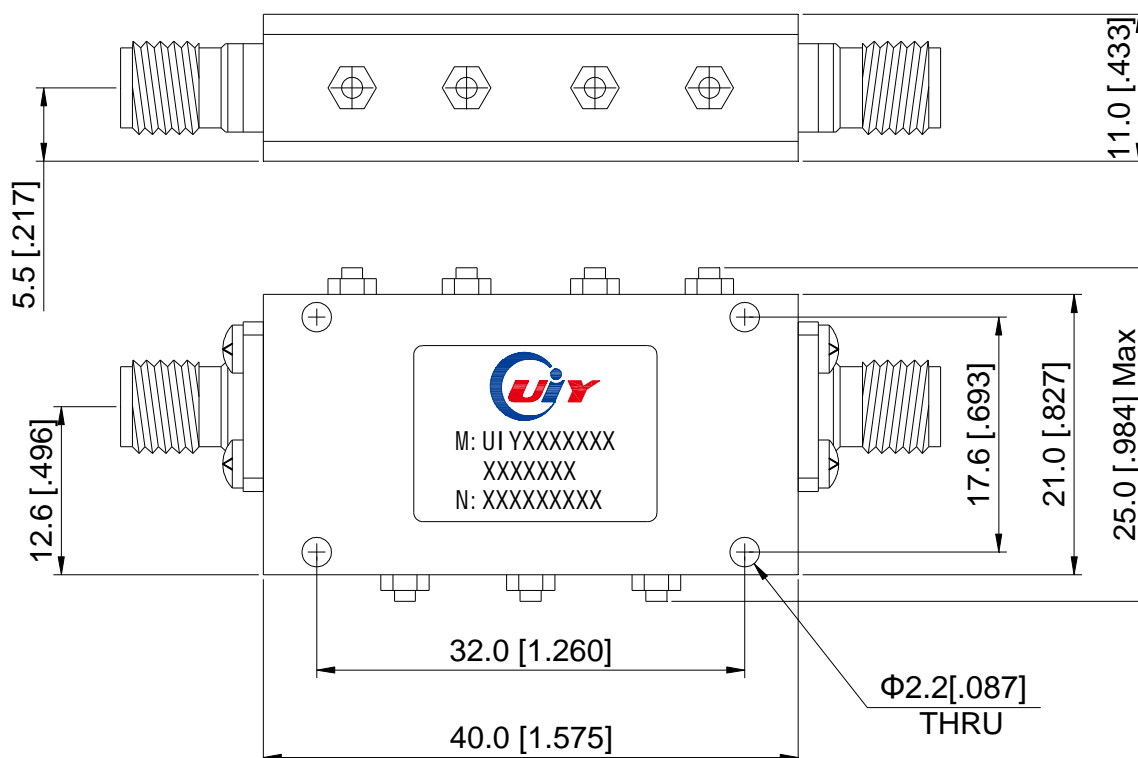

Unit: mm/ inch, General part tolerance is  $\pm 2\%$  unless otherwise stated.

Ver. 5

3/F, Building A5, Shenbao Power Industrial Park, Shenzhen 518116, China.

Web: [www.uiy.com](http://www.uiy.com)

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

E-mail: [sales@uiy.com](mailto:sales@uiy.com)