

3800 to 4000MHz – Band Pass Filter

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

RF Characteristics

| Model Number | Pass Band (MHz) | Insertion Loss Max(dB) | VSWR Max | Rejection | Power (W) | Connector Type | Temp.(°C) |
|------------------------|-----------------|------------------------|----------|--|-----------|----------------|-----------|
| UIYBPF6023A3800T4000SF | 3800 ~ 4000 | 1.5 | 1.5 | 40dB @DC-3650MHz 40dB @4150-8000MHz | 30 | SMA-F | -40 ~ +85 |

² Listed are specific frequency ranges and other ranges are available.
² Please provide the below information when inquiring and mark * is required.
 * 1. The specific pass band frequency range
 * 2. The specific rejection and frequency
 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

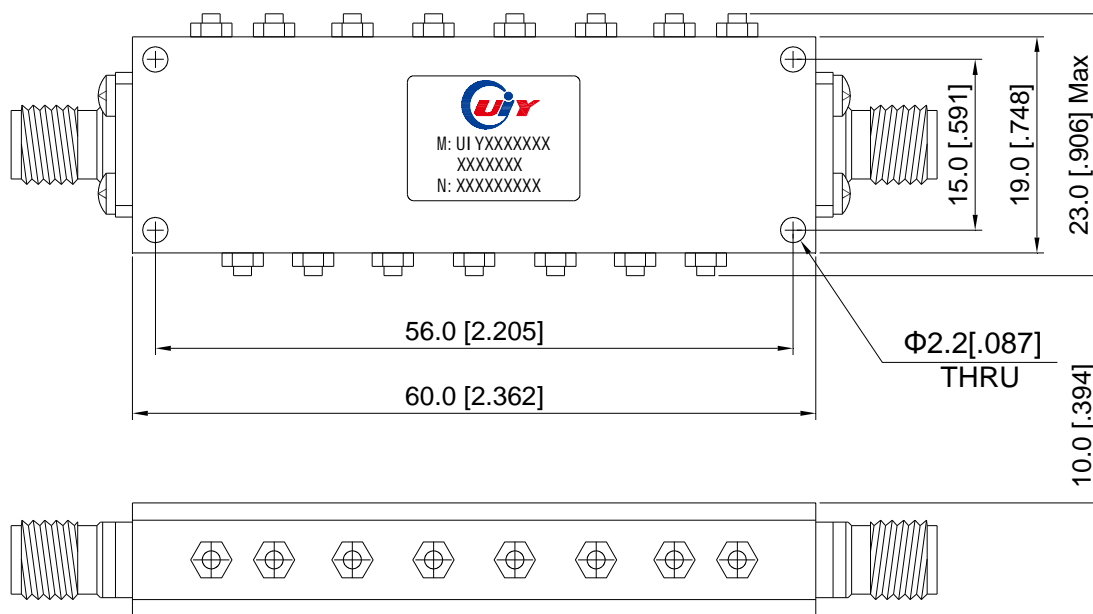

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5

3/F, Building A5, Shenbao Power Industrial Park, Shenzhen 518116, China.

Web: www.uiy.com

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

E-mail: sales@uiy.com