

5670 to 5885MHz – Band Pass Filter

Design Features

- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

| Model Number | Pass Band (MHz) | Insertion Loss Max(dB) | VSWR Max | Rejection | Power (W) | Connector Type | Temp.(°C) |
|------------------------|-----------------|------------------------|----------|--|-----------|----------------|-----------|
| UIYBPF6122A5670T5885SF | 5670 ~ 5885 | 2.0 | 1.5 | 50dB @DC~5500MHz 40dB @6000~1100MHz | 10 | SMA-F | -40 ~ +85 |

2 Listed are specific frequency ranges and tailor-made ranges are available.


2 Please provide the below information when inquiring and mark * is required.

* 1. The specific pass band frequency range

* 2. The specific rejection and frequency

3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

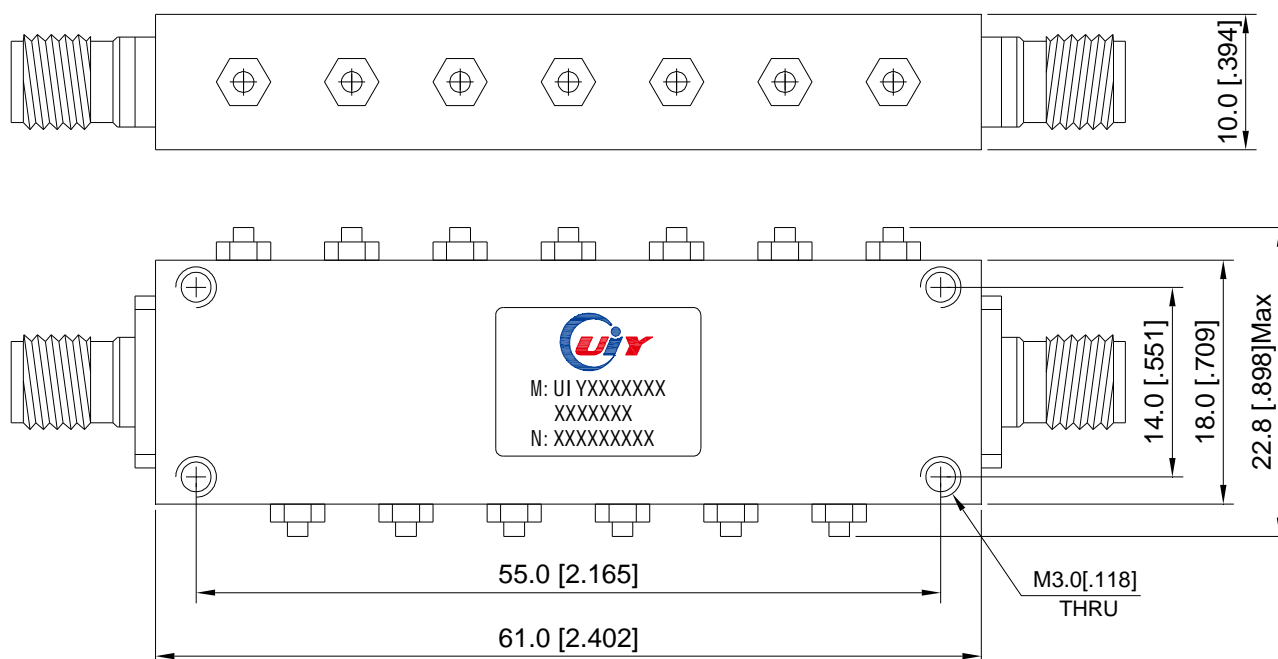

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5.2