

2090 to 2190MHz – Band Pass Filter

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.
- ◆ Military, space and commercial applications.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Pass Band (MHz)	Insertion Loss Max(dB)	Ripple Max(dB)	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYBPF7070A2090T2190SF	2090 ~ 2190	0.6	0.5	1.3	30dB@DC~1980MHz 30dB@2300~3000MHz	100	SMA-F	-40 ~ +85
UIYBPF7070A2090T2190NF	2090 ~ 2190	0.6	0.5	1.3	30dB@DC~1980MHz 30dB@2300~3000MHz	100	N-F	-40 ~ +85

² Listed are specific frequency ranges and tailor-made ranges are available.
² Please provide the below information when inquiring and mark * is required.
 * 1. The specific pass band frequency range.
 * 2. The specific rejection and frequency.
 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

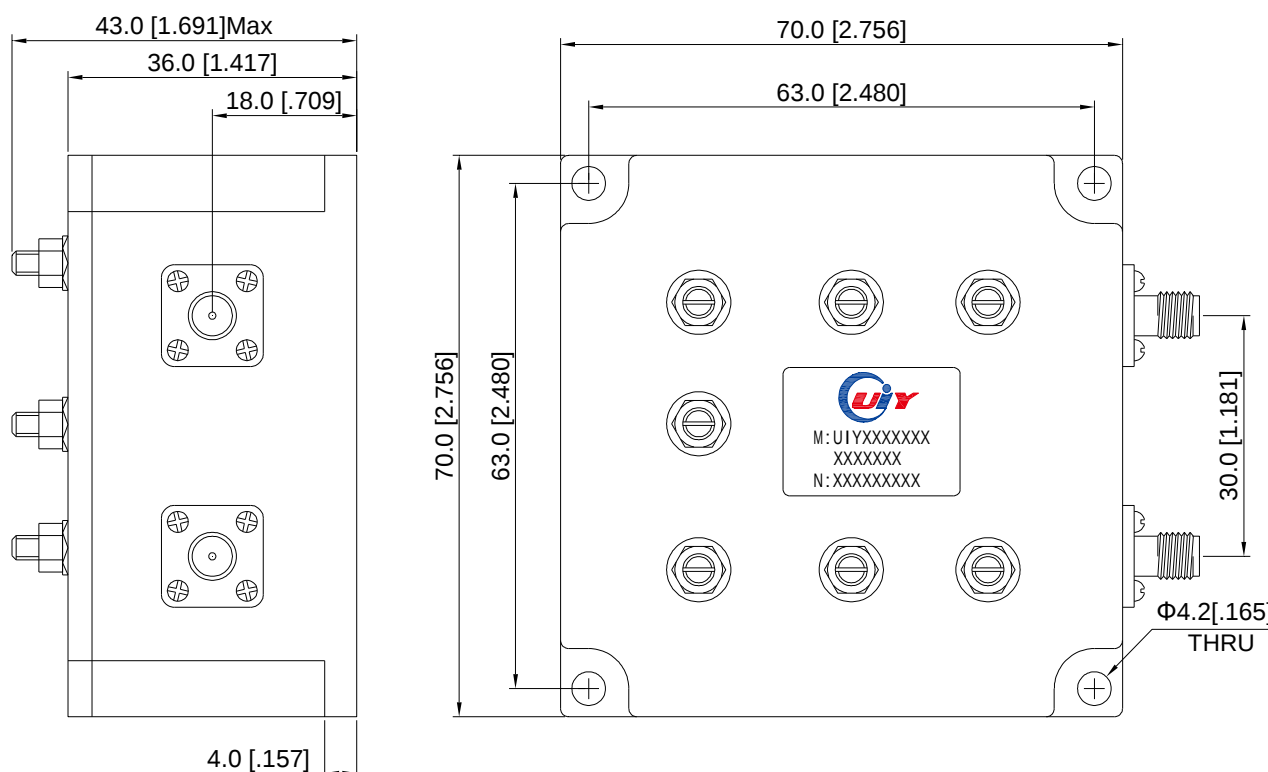

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5.0

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China.

Web: www.uiy.com

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

E-mail: sales@uiy.com