

220 to 230MHz – Band Pass Filter

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.
- ◆ Military, space and commercial applications.
- ◆ Guaranteed for one year standard.

RF Characteristics

Model Number	Pass Band (MHz)	Insertion Loss Max(dB)	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYBPF7373A2234T2248BF	223.4 ~ 224.8	3.5	1.3	60dB @214.1MHz & 234.1MHz 35dB @219.8MHz & 228.4MHz	50	BNC-F	-40 ~ +85
UIYBPF7373A2279T2289BF	227.9 ~ 228.9	3.5	1.3	35dB @224.1MHz & 232.7MHz 10dB @226.1MHz & 230.7MHz	50	BNC-F	-40 ~ +85

- ² Listed are specific frequency ranges and other ranges are available.
- ² Please provide the below informations when inquiring and mark * is required.
- * 1. The specific pass band frequency range.
 - * 2. The specific rejection and frequency.
 - 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

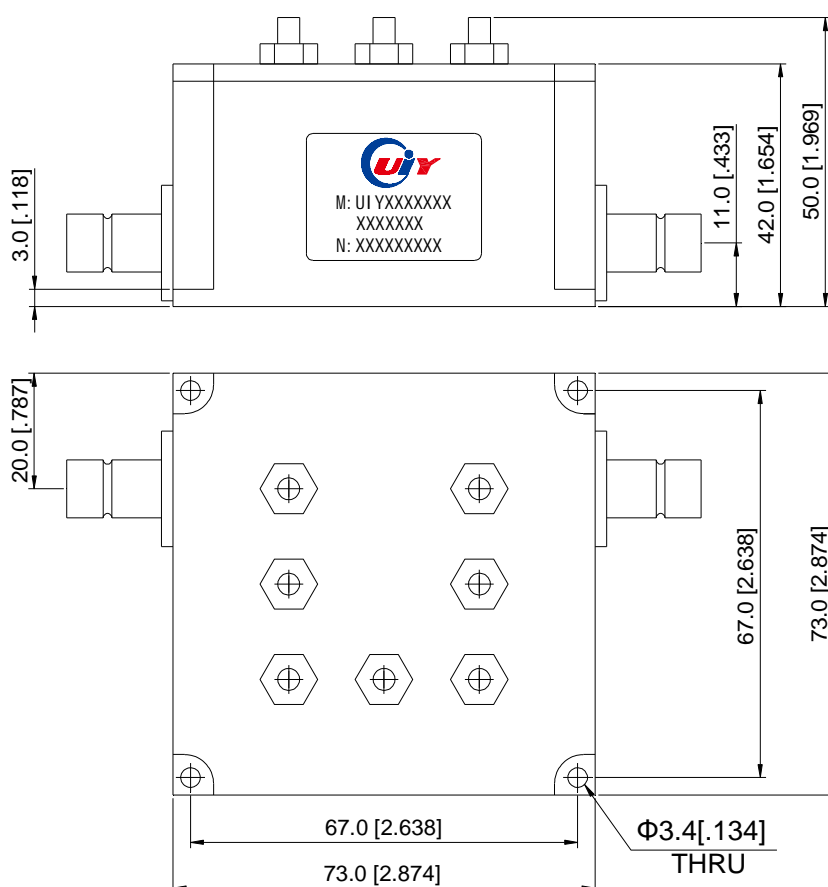

Unit: mm/ inch, General part tolerance is ± 0.2 mm unless otherwise stated.

Ver. 5