

1350 to 1785MHz – Band Pass Filter

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.
- ◆ Military, space and commercial applications.
- ◆ Guaranteed for one year standard.

RF Characteristics

Model Number	Pass Band (MHz)	Insertion Loss Max(dB)	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYBPF7855A1350T1518SF	1350 ~ 1518	3.0	1.5	40dB @1625 ~ 1785MHz	50	SMA-F	-55 ~ +85
UIYBPF7855A1625T1785SF	1625 ~ 1785	3.0	1.5	40dB @1350 ~ 1518MHz	50	SMA-F	-55 ~ +85

- 2 Listed are specific frequency ranges and other ranges are available.
- 2 Please provide the below informations when inquiring and mark * is required.
- * 1. The specific pass band frequency range.
- * 2. The specific rejection and frequency.
3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

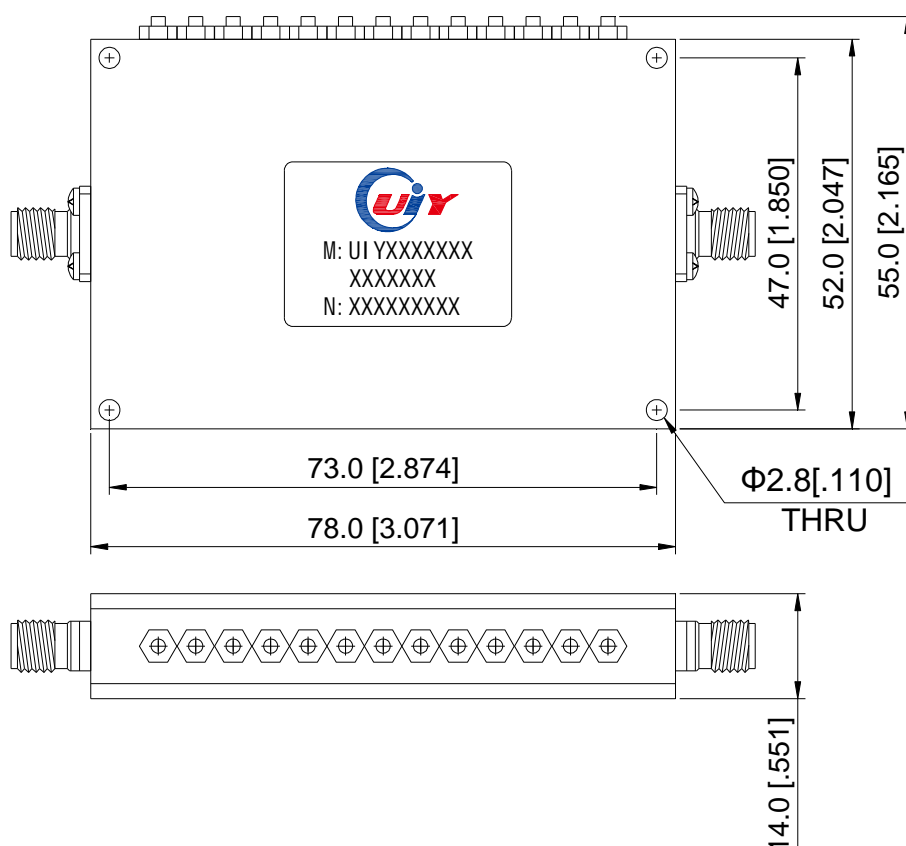

Unit: mm/ inch, General part tolerance is $\pm 0.2\text{mm}$ unless otherwise stated.

Ver. 5