1430 to 1470MHz – Band Pass Filter

Design Features

- High RF performance, ultra-competitive price.
- Military, space and commercial applications.
- Custom design available upon request.
- Support one year standard warranty.

RF Characteristics

Model Number	Pass Band (MHz)	Insertion Loss Max(dB)	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYBPF8383A1434T1436NF	1434 ~ 1436	1.5	1.35	35dB @Fo±10MHz	10	N-F	-40 ~ +85
UIYBPF8383A1461T1463SF	1461 ~ 1463	1.5	1.35	35dB @Fo±10MHz	10	SMA-F	-40 ~ +85

- Listed are specific frequency ranges and tailor-made ranges are available.
- Please provide the below information when inquiring and mark * is required.
  - * 1. The specific pass band frequency range
  - * 2. The specific rejection and frequency
  - 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

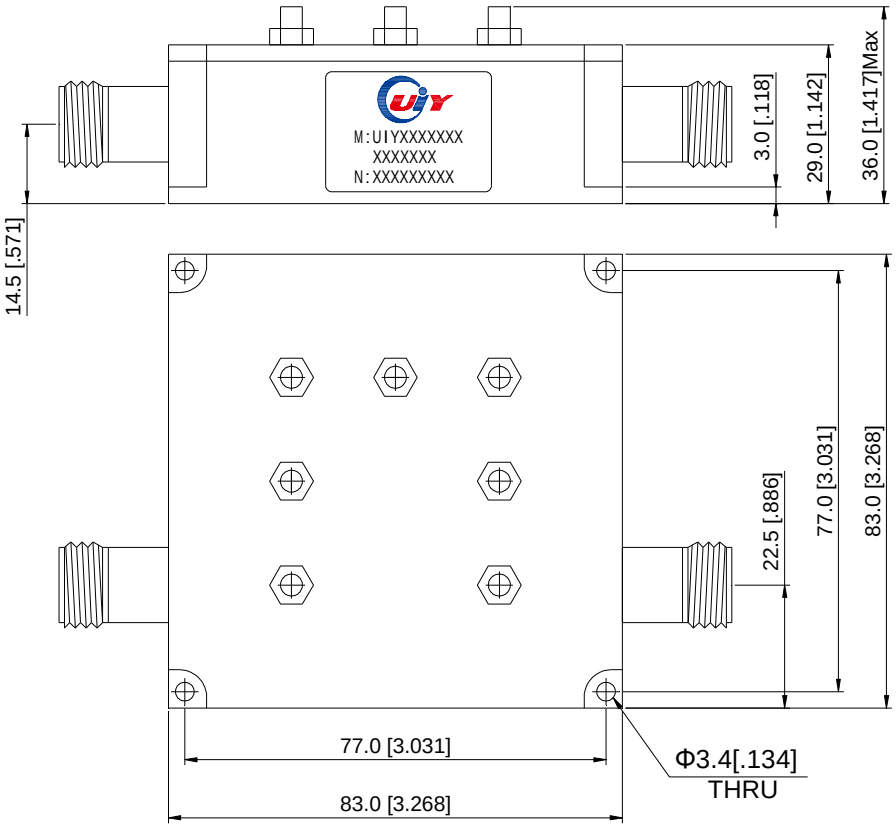

Unit: mm/ inch, General part tolerance is ±0.2mm unless otherwise stated.

Ver. 5

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China. Web: www.uiy.com
Tel: +86-755-83748888 +86-755-25999990 Fax: +86-755-25999959 E-mail: sales@uiy.com