

## 2592 to 2598MHz –Band Stop Filter

### Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

### RF Characteristics

Model Number	Band Reject Frequency (MHz)	Pass Band Frequency	Band Reject Rejection Min(dB)	VSWR Max	Insertion Loss Max(dB)	Power (W)	Connector Type	Temp.(°C)
UIYBSF12070A2592T2598SF	2592~2598	DC~2580MHz 2610~3000MHz	40	2.0	1.5	50	SMA-F	-55 ~ +85

- 2 Listed are specific frequency ranges and other tailor-made ranges are available.
- 2 Please provide the below information when inquiring and mark \* is required.
- \* 1. The specific pass band frequency range.
- \* 2. The specific rejection and frequency.
3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.).

### Mechanical Drawing

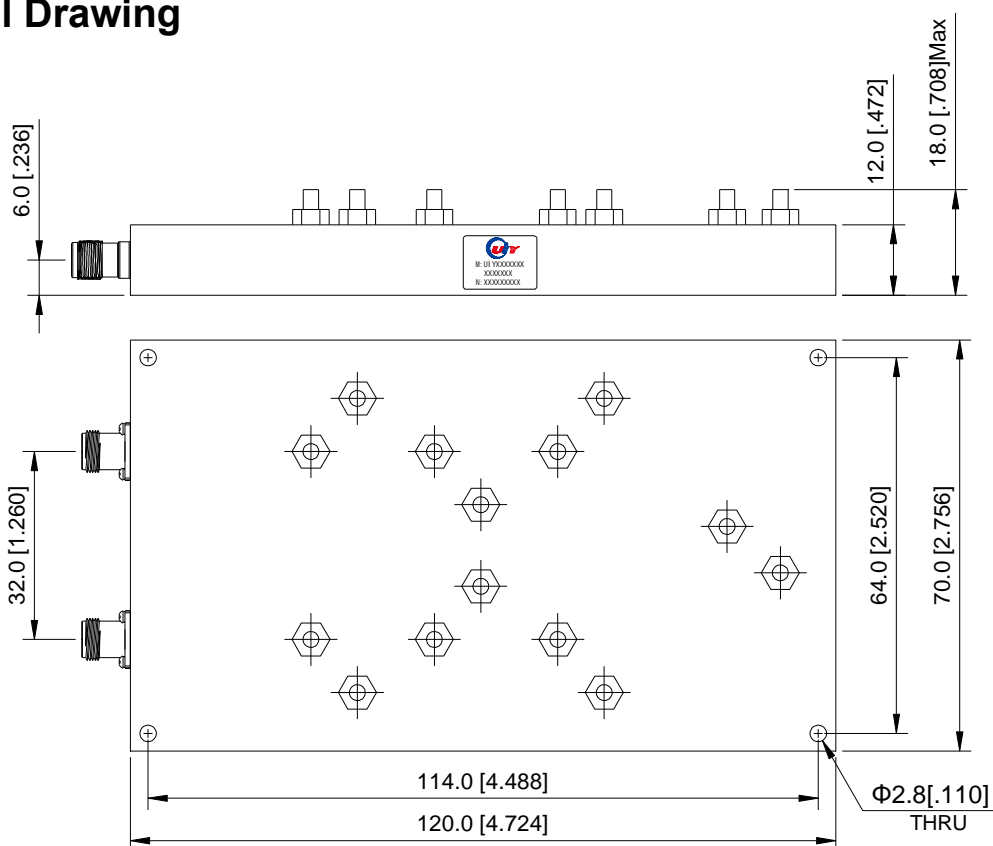

Unit: mm/ inch, General part tolerance is  $\pm 2\%$  unless otherwise stated.

Ver. 5

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China.

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

Web: [www.uiy.com](http://www.uiy.com)

E-mail: [sales@uiy.com](mailto:sales@uiy.com)