

1557 to 1615MHz – Band Stop Filter

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

RF Characteristics

Model Number	Band Reject Frequency (MHz)	Pass Band Frequency	Band Reject Rejection Min(dB)	VSWR Max	Insertion Loss Max(dB)	Power (W)	Connector Type	Temp.(°C)
UIYBSF14768A1557T1615SF	1557 ~ 1615	DC~1450MHz 1730~3000MHz	45	2.0	1.5	50	SMA-F	-55 ~ +85

- ◇ Listed are specific frequency ranges and other ranges are available.
- ◇ Please provide the below informations when inquiring and mark * is required.
 - * 1. The specific pass band frequency range
 - * 2. The specific rejection and frequency
 - * 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

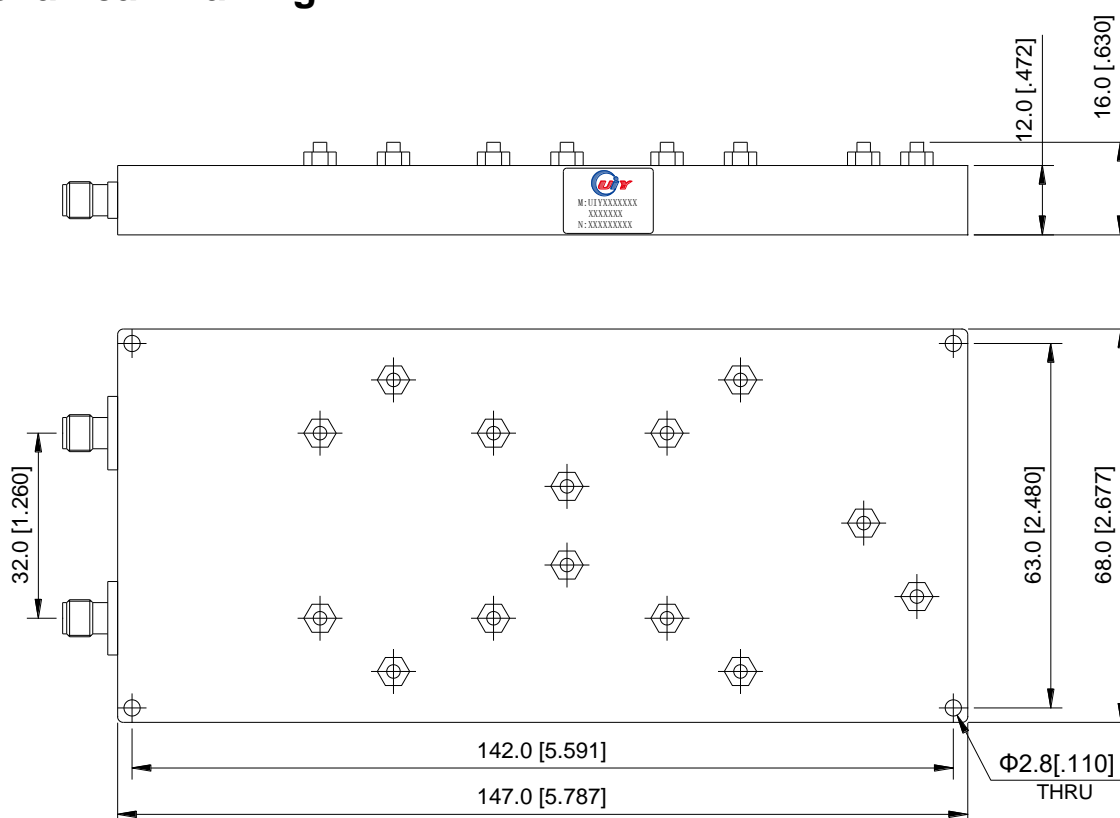

Unit: mm/ inch, General part tolerance is ± 0.2 mm unless otherwise stated.

Ver. 5