

1020 to 1100MHz –Band Stop Filter

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

RF Characteristics

Model Number	Band Reject Frequency (MHz)	Pass Band Frequency	Band Reject Rejection Min(dB)	Insertion Loss Max(dB)	VSWR Max	Power (W)	Connector Type	Temp.(°C)
UIYBSF165111A1020T1100SF	1020 ~ 1100	DC-920MHz 1200-2100MHz	45	1.5	2.0	5	SMA-F	-40 ~ +85

- ◇ Listed are specific frequency ranges and other ranges are available.
- ◇ Please provide the below information when inquiring and mark * is required.
 - * 1. The specific pass band frequency range
 - * 2. The specific rejection and frequency
 - * 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

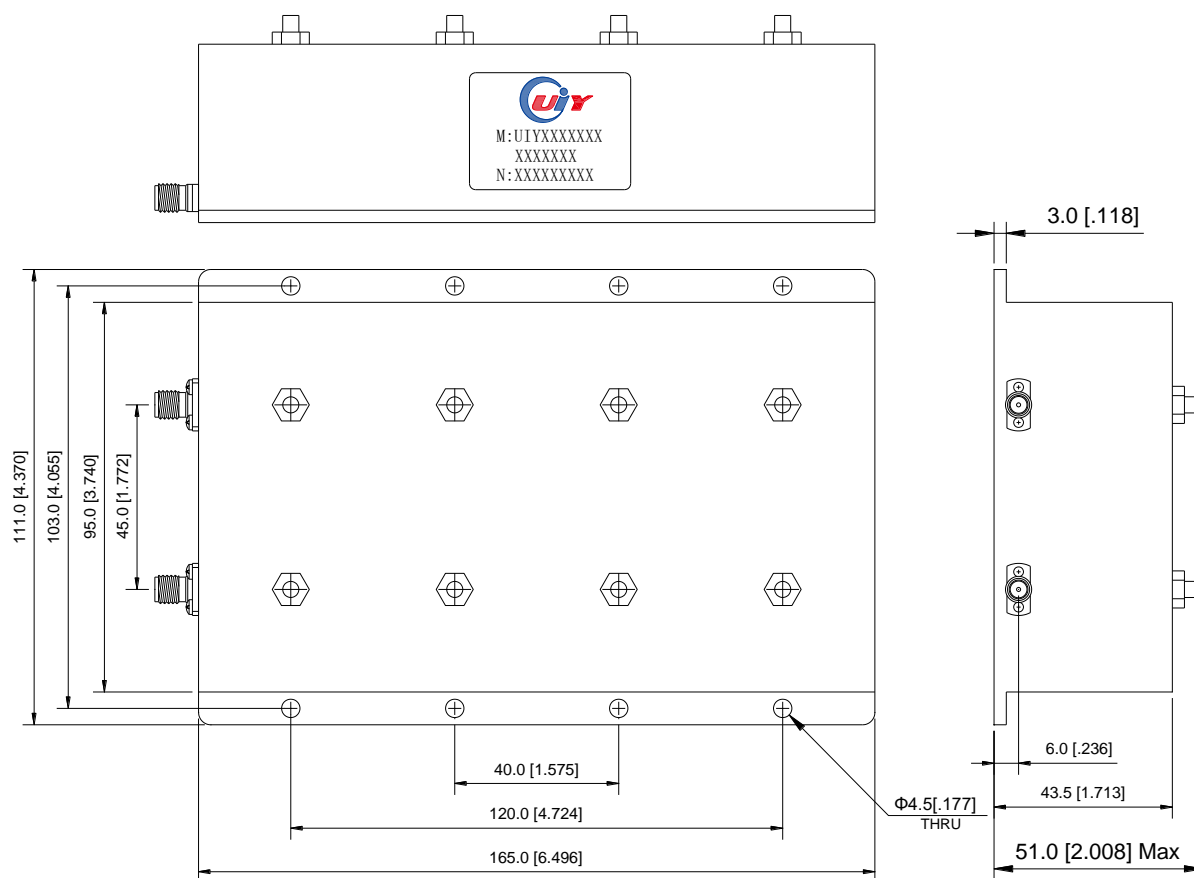

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.