

## 460 to 520MHz –Band Stop Filter

### Design Features

- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

### RF Characteristics

Model Number	Band Reject Frequency (MHz)	Pass Band Frequency	Band Reject Rejection Min(dB)	Insertion Loss Max(dB)	Passband Riplpe	VSWR Max	Power (W)	Connector Type	Temp.(°C)
UIYBSF4012A 460T520SF	460 ~ 520	DC~402MHz 578~2000MHz	65	2.5	2.0	1.8	2	SMA-F	-55 ~ +85

2 Listed are specific frequency ranges and other ranges are available.


2 Please provide the below information when inquiring and mark \* is required.

\* 1. The specific pass band frequency range

\* 2. The specific rejection and frequency

3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

### Mechanical Drawing

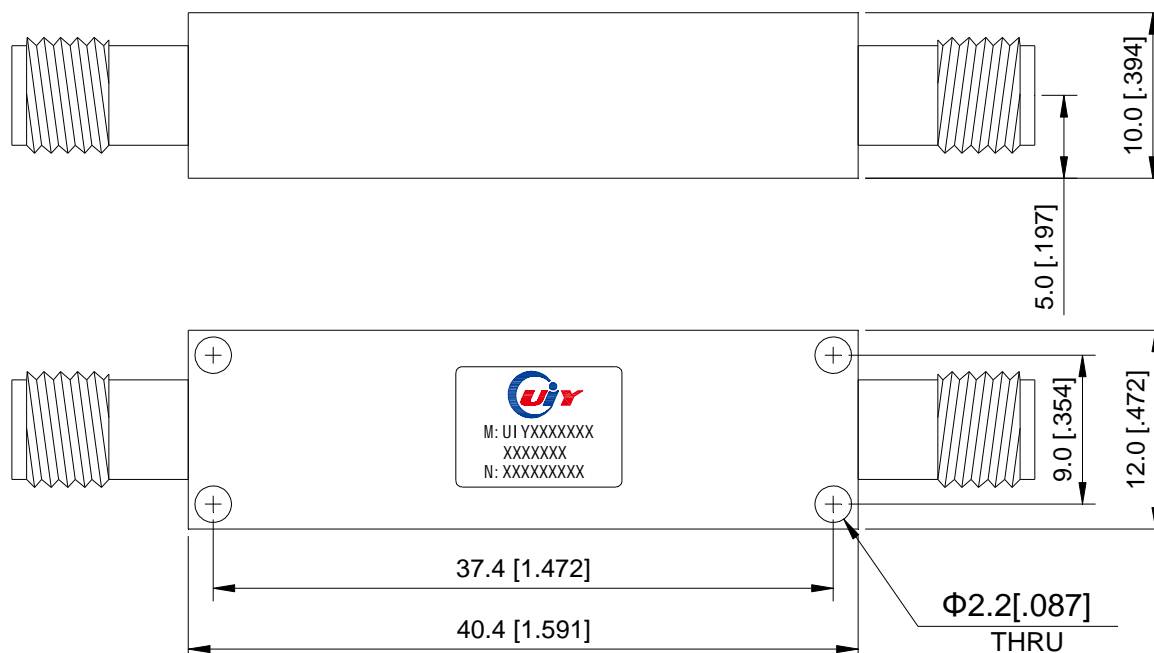

Unit: mm/ inch, General part tolerance is  $\pm 2\%$  unless otherwise stated.

Ver. 5