

100W 26.5GHz – Coaxial Attenuator

Design Features

- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.
- ◆ Military, space and commercial applications.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Attenuation Value	Freq. Range	VSWR Max	Attenuation Tolerance	Power	Connector Type	Impedance
UIYCA100A35265A10	10 dB	DC-26.5GHz	1.45	+2.5dB -1.5dB	100W	3.5mm-M / 3.5mm-F	50 Ω
UIYCA100A35265A20	20 dB	DC-26.5GHz	1.45	+2.5dB -1.5dB	100W	3.5mm-M / 3.5mm-F	50 Ω
UIYCA100A35265A30	30 dB	DC-26.5GHz	1.45	+2.5dB -1.5dB	100W	3.5mm-M / 3.5mm-F	50 Ω
UIYCA100A35265A40	40 dB	DC-26.5GHz	1.45	+2.5dB -1.5dB	100W	3.5mm-M / 3.5mm-F	50 Ω

² Listed are specific frequency ranges and tailor-made ranges are available.


² Please provide the information below when inquiring and mark * is required.

* 1. Power handling, Attenuation Value

2. Connect type (SMA Male/ Female, N Male/ Female, etc.)

3. Other special requests (VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

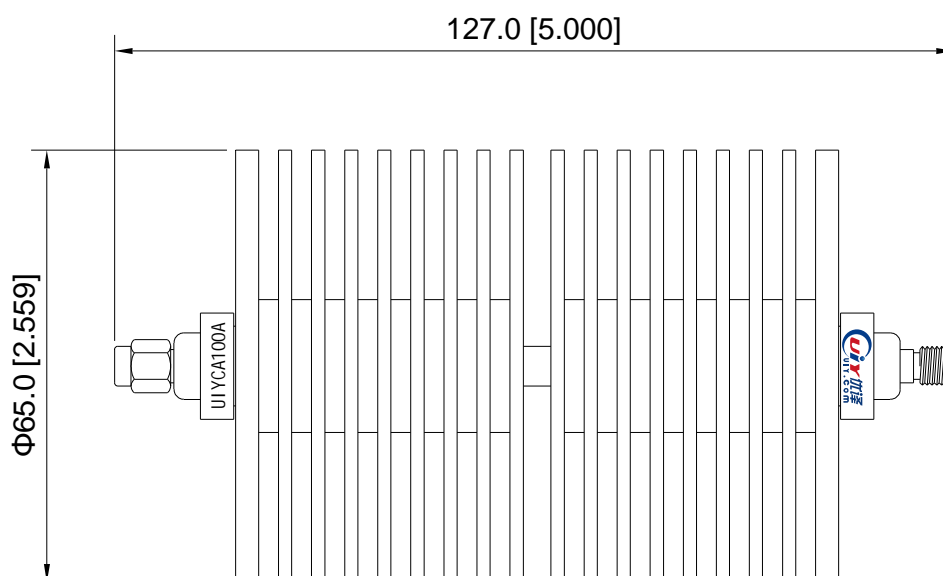

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5.0

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China.

Web: www.uiy.com

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

E-mail: sales@uiy.com