

# 10W 26.5GHz – Coaxial Attenuator

## Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.
- ◆ Military, space and commercial applications.
- ◆ Guaranteed for one year standard.

## RF Characteristics

Model Number	Freq. Range	Power	Attenuation Value	Attenuation Tolerance	VSWR Max	Connector Type	Impedance
UIYCA10AS8A3	DC-8GHz	10W	3 dB	±0.6 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA10AS8A10		10W	10 dB	±0.6 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA10AS8A20		10W	20 dB	±0.8 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA10AS8A30		10W	30 dB	±1.0 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA10AS8A40		10W	40 dB	±1.0 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA10AS124A3	DC-12.4GHz	10W	3 dB	±0.6 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA10AS124A10		10W	10 dB	±0.6 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA10AS124A20		10W	20 dB	±0.8 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA10AS124A30		10W	30 dB	±1.0 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA10AS124A40		10W	40 dB	±1.5 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA10AS18A3	DC-18GHz	10W	3 dB	±0.6 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA10AS18A10		10W	10 dB	±0.6 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA10AS18A20		10W	20 dB	±0.8 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA10AS18A30		10W	30 dB	±1.0 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA10AS18A40		10W	40 dB	±2.0 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA10AS265A3	DC-26.5GHz	10W	3 dB	±1.5 dB	1.35	SMA-M / SMA-F	50 Ω
UIYCA10AS265A10		10W	10 dB	±2.0 dB	1.35	SMA-M / SMA-F	50 Ω
UIYCA10AS265A20		10W	20 dB	±2.0 dB	1.35	SMA-M / SMA-F	50 Ω
UIYCA10AS265A30		10W	30 dB	±2.0 dB	1.35	SMA-M / SMA-F	50 Ω
UIYCA10AS265A40		10W	40 dB	±2.0 dB	1.35	SMA-M / SMA-F	50 Ω

- <sup>2</sup> List are specify frequency range and other ranges available.  
<sup>2</sup> Please enter below information when inquiry and mark \* is must.  
 \* 1. Power handling, Attenuation Value  
 2. Connect type (SMA Male/ Female, N Male/ Female, etc.)  
 3. Other special request if have (VSWR, Temperature, Dimension, etc.)

## Mechanical Drawing

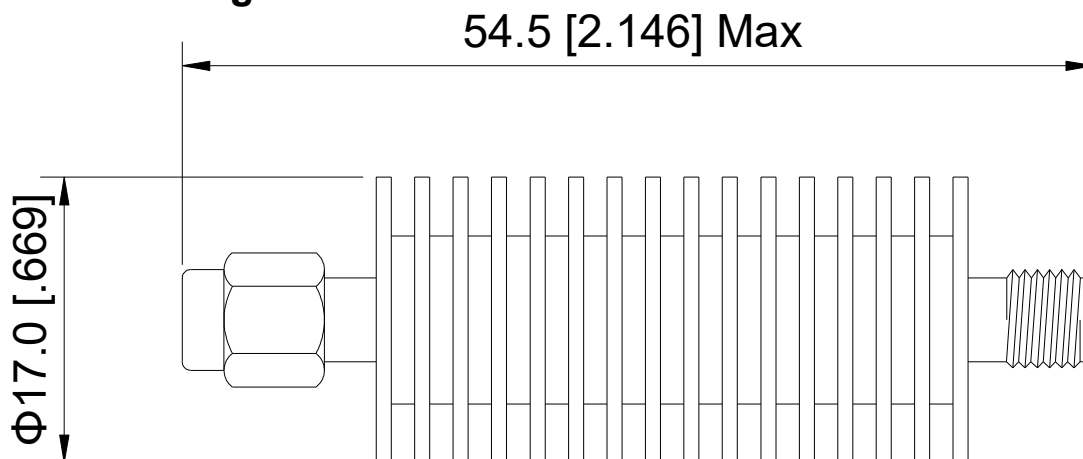

Unit: mm/ inch, General part tolerance is ±2% unless otherwise stated.

Ver. 5