

## 2000W – Coaxial Attenuator

### Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

### RF Characteristics

Model Number	Freq. Range	Power	Attenuation Value	Attenuation Tolerance	VSWR Max	Connector Type	Impedance
UIYCA2000A7163A10	DC-3GHz	2000W	10 dB	±2.8 dB	1.3	7/16-M to 7/16-F	50 Ω
UIYCA2000A7163A20	DC-3GHz	2000W	20 dB	±2.5 dB	1.3	7/16-M to 7/16-F	50 Ω
UIYCA2000A7163A30	DC-3GHz	2000W	30 dB	±2.5 dB	1.3	7/16-M to 7/16-F	50 Ω
UIYCA2000A7163A40	DC-3GHz	2000W	40 dB	±2.5 dB	1.3	7/16-M to 7/16-F	50 Ω
UIYCA2000A7163A50	DC-3GHz	2000W	50 dB	±2.5 dB	1.3	7/16-M to 7/16-F	50 Ω
UIYCA2000A7163A60	DC-3GHz	2000W	60 dB	±3.0 dB	1.3	7/16-M to 7/16-F	50 Ω

- 2 List are specify frequency range and other ranges available.  
 2 Please enter below information when inquiry and mark \* is must.  
 \* 1. Power handling, Attenuation Value  
 2. Connect type (SMA Male/ Female, N Male/ Female, etc.)  
 3. Other special request if have (VSWR, Temperature, Dimension, etc.)

### Mechanical Drawing

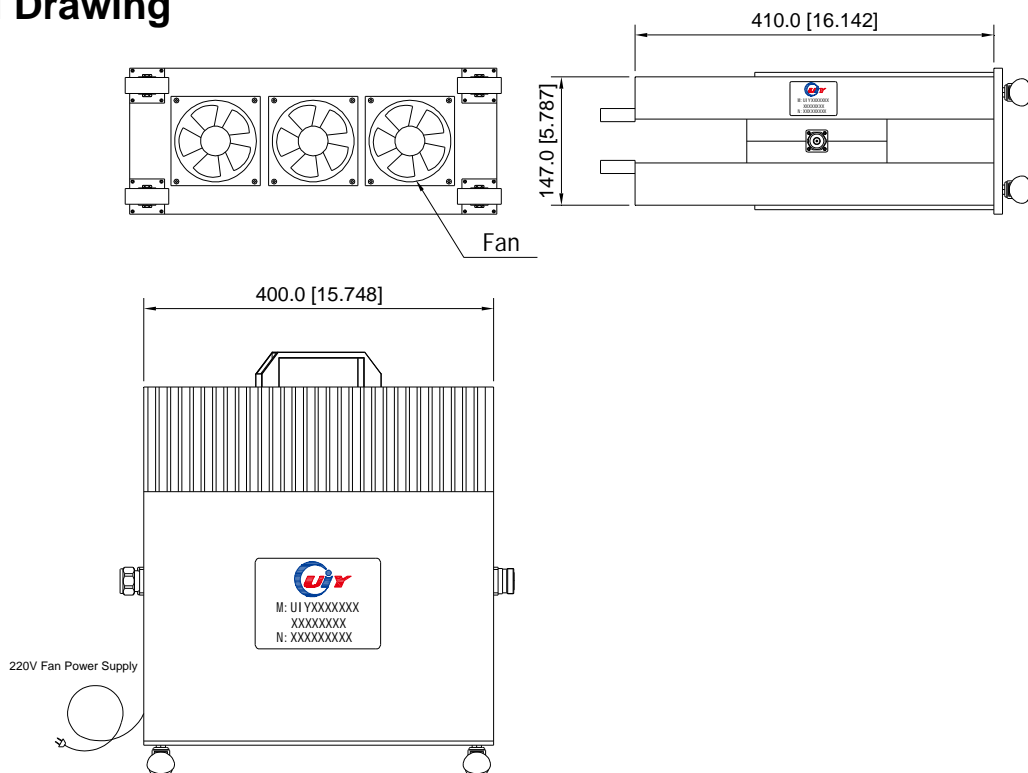

Unit: mm/ inch, General part tolerance is ±2% unless otherwise stated.

Ver. 5

3/F, No 9, Xiangyin Rd, Longgang District, Shenzhen 518116, China.

Web: [www.uiy.com](http://www.uiy.com)

Tel: +86-755-25999990 +86-755-25999909

Fax: +86-755-25999959

E-mail: [sales@uiy.com](mailto:sales@uiy.com)