

200W – Coaxial Attenuator

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

RF Characteristics

Model Number	Freq. Range	Power	Attenuation Value	Attenuation Tolerance	VSWR Max	Connector Type	Impedance
UIYCA200AN3A1	DC-3GHz	200W	1 dB	±0.6 dB	1.2	N-M / N-F	50 Ω
UIYCA200AN3A2	DC-3GHz	200W	2 dB	±0.6 dB	1.2	N-M / N-F	50 Ω
UIYCA200AN3A3	DC-3GHz	200W	3 dB	±0.6 dB	1.2	N-M / N-F	50 Ω
UIYCA200AN3A5	DC-3GHz	200W	5 dB	±0.6 dB	1.2	N-M / N-F	50 Ω
UIYCA200AN3A6	DC-3GHz	200W	6 dB	±0.6 dB	1.2	N-M / N-F	50 Ω
UIYCA200AN3A10	DC-3GHz	200W	10 dB	±0.6 dB	1.2	N-M / N-F	50 Ω
UIYCA200AN3A20	DC-3GHz	200W	20 dB	±0.8 dB	1.2	N-M / N-F	50 Ω
UIYCA200AN3A30	DC-3GHz	200W	30 dB	±0.8 dB	1.2	N-M / N-F	50 Ω
UIYCA200AN3A40	DC-3GHz	200W	40 dB	±1.0 dB	1.2	N-M / N-F	50 Ω
UIYCA200AN6A1	DC-6GHz	200W	1 dB	±0.6 dB	1.25	N-M / N-F	50 Ω
UIYCA200AN6A2	DC-6GHz	200W	2 dB	±0.6 dB	1.25	N-M / N-F	50 Ω
UIYCA200AN6A3	DC-6GHz	200W	3 dB	±0.6 dB	1.25	N-M / N-F	50 Ω
UIYCA200AN6A5	DC-6GHz	200W	5 dB	±0.6 dB	1.25	N-M / N-F	50 Ω
UIYCA200AN6A6	DC-6GHz	200W	6 dB	±0.6 dB	1.25	N-M / N-F	50 Ω
UIYCA200AN6A10	DC-6GHz	200W	10 dB	±0.8 dB	1.25	N-M / N-F	50 Ω
UIYCA200AN6A20	DC-6GHz	200W	20 dB	±1.0 dB	1.25	N-M / N-F	50 Ω
UIYCA200AN6A30	DC-6GHz	200W	30 dB	±1.0 dB	1.25	N-M / N-F	50 Ω
UIYCA200AN6A40	DC-6GHz	200W	40 dB	±1.0 dB	1.25	N-M / N-F	50 Ω

- ² List are specify frequency range and other ranges available.
- ² Please enter below information when inquiry and mark * is must.
- * 1. Power handling, Attenuation Value
 - 2. Connect type (SMA Male/ Female, N Male/ Female, etc.)
 - 3. Other special request if have (VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

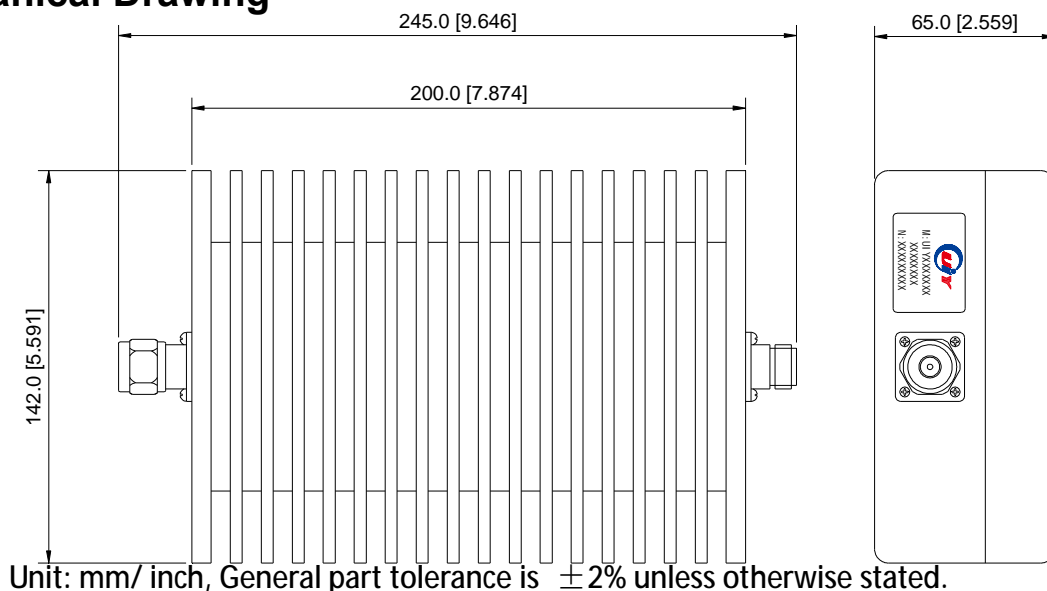

Ver. 5