

## 2W 12.4GHz SMA – Coaxial Attenuator

### Design Features

- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.
- ◆ Military, space and commercial applications.
- ◆ Guaranteed for one year standard.

### RF Characteristics

Model Number	Freq. Range	Power	Attenuation Value	Attenuation Tolerance	VSWR Max	Connector Type	Impedance
UIYCA2AS124A5	DC-12.4GHz	2W	5 dB	±0.5 dB	1.25	SMA-M / SMA-F	50 Ω
UIYCA2AS124A6		2W	6 dB	±0.5 dB	1.25	SMA-M / SMA-F	50 Ω
UIYCA2AS124A10		2W	10 dB	±0.6 dB	1.25	SMA-M / SMA-F	50 Ω
UIYCA2AS124A15		2W	15 dB	±0.6 dB	1.25	SMA-M / SMA-F	50 Ω
UIYCA2AS124A20		2W	20 dB	±0.6 dB	1.25	SMA-M / SMA-F	50 Ω
UIYCA2AS124A30		2W	30 dB	±0.8 dB	1.25	SMA-M / SMA-F	50 Ω
UIYCA2AS124A40		2W	40 dB	±1.5 dB	1.25	SMA-M / SMA-F	50 Ω
UIYCA2AS124A50		2W	50 dB	±1.5 dB	1.25	SMA-M / SMA-F	50 Ω
UIYCA2AS124A60		2W	60 dB	±1.8 dB	1.25	SMA-M / SMA-F	50 Ω

<sup>2</sup> List are specify frequency range and other ranges available.


<sup>2</sup> Please enter below information when inquiry and mark \* is must.

\* 1. Power handling, Attenuation Value


2. Connect type (SMA Male/ Female, N Male/ Female, etc.)

3. Other special request if have (VSWR, Temperature, Dimension, etc.)

### Mechanical Drawing

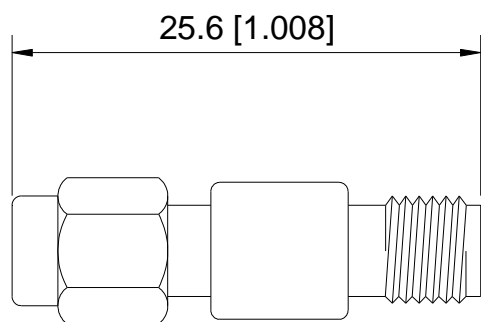

1~40dB

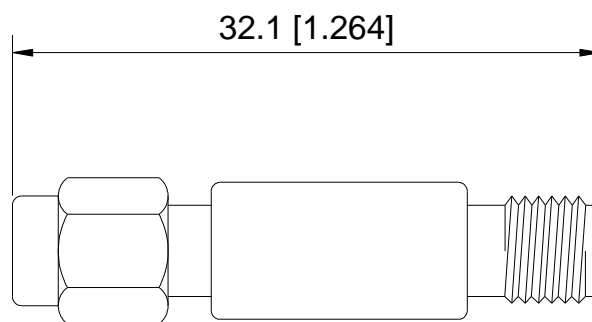

50~60dB

Unit: mm/ inch, General part tolerance is ±2% unless otherwise stated.

Ver. 5

3/F, No 9, Xiangyin Rd, Longgang District, Shenzhen 518116, China.

Web: [www.uiy.com](http://www.uiy.com)

Tel: +86-755-25999990 +86-755-25999909

Fax: +86-755-25999959

E-mail: [sales@uiy.com](mailto:sales@uiy.com)