

2W 18GHz SMA – Coaxial Attenuator

Design Features

- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.
- ◆ Military, space and commercial applications.
- ◆ Guaranteed for one year standard.

RF Characteristics

Model Number	Freq. Range	Power	Attenuation Value	Attenuation Tolerance	VSWR Max	Connector Type	Impedance
UIYCA2AS18A1	DC-18GHz	2W	1 dB	±0.5 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA2AS18A2		2W	2 dB	±0.8 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA2AS18A3		2W	3 dB	±0.8 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA2AS18A5		2W	5 dB	±0.8 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA2AS18A6		2W	6 dB	±0.8 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA2AS18A10		2W	10 dB	±1.0 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA2AS18A15		2W	15 dB	±1.0 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA2AS18A20		2W	20 dB	±1.0 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA2AS18A30		2W	30 dB	±1.5 dB	1.3	SMA-M / SMA-F	50 Ω

² List are specify frequency range and other ranges available.


² Please enter below information when inquiry and mark * is must.

* 1. Power handling, Attenuation Value

2. Connect type (SMA Male/ Female, N Male/ Female, etc.)

3. Other special request if have (VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

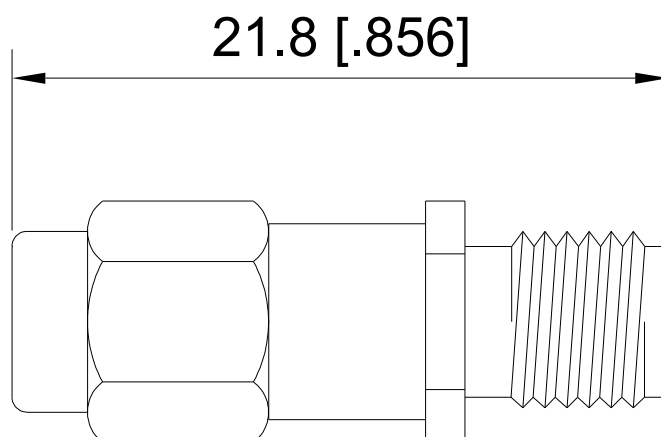

Unit: mm/ inch, General part tolerance is ±2% unless otherwise stated.

Ver. 5

3/F, No 9, Xiangyin Rd, Longgang District, Shenzhen 518116, China.

Web: www.uiy.com

Tel: +86-755-25999990 +86-755-25999909

Fax: +86-755-25999959

E-mail: sales@uiy.com