

7 to 10GHz – Coaxial Circulator

Design Features

- ◆ Can be dual junction or multiple for high isolation.
- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Freq. Range (GHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYCC1624A74T77NF	7.4 ~ 7.7	0.3	23	1.2	60	60	N-F	-40 ~ +85
UIYCC1624A79T84NMTNF	7.9 ~ 8.4	0.3	23	1.2	60	60	N-M to N-F	-40 ~ +85
UIYCC1624A8T9NF	8.0 ~ 9.0	0.4	20	1.2	60	60	N-F	-40 ~ +85
UIYCC1624A93T97NMTNF	9.3 ~ 9.7	0.3	23	1.2	60	60	N-M to N-F	-40 ~ +85
UIYCC1624A95T10NF	9.5 ~ 10.0	0.3	23	1.2	60	60	N-F	-40 ~ +85

² Listed are specific frequency ranges and tailor-made ranges are available.

² Please provide the information below when inquiring and mark * is required.


* 1. The specific frequency ranges

* 2. Power handling (Forward, Reverse, Peak, etc.)

* 3. Connect type (SMA Male/ Female, N Male/ Female, etc.)

4. Other special request if have (Insertion Loss, Isolation, VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

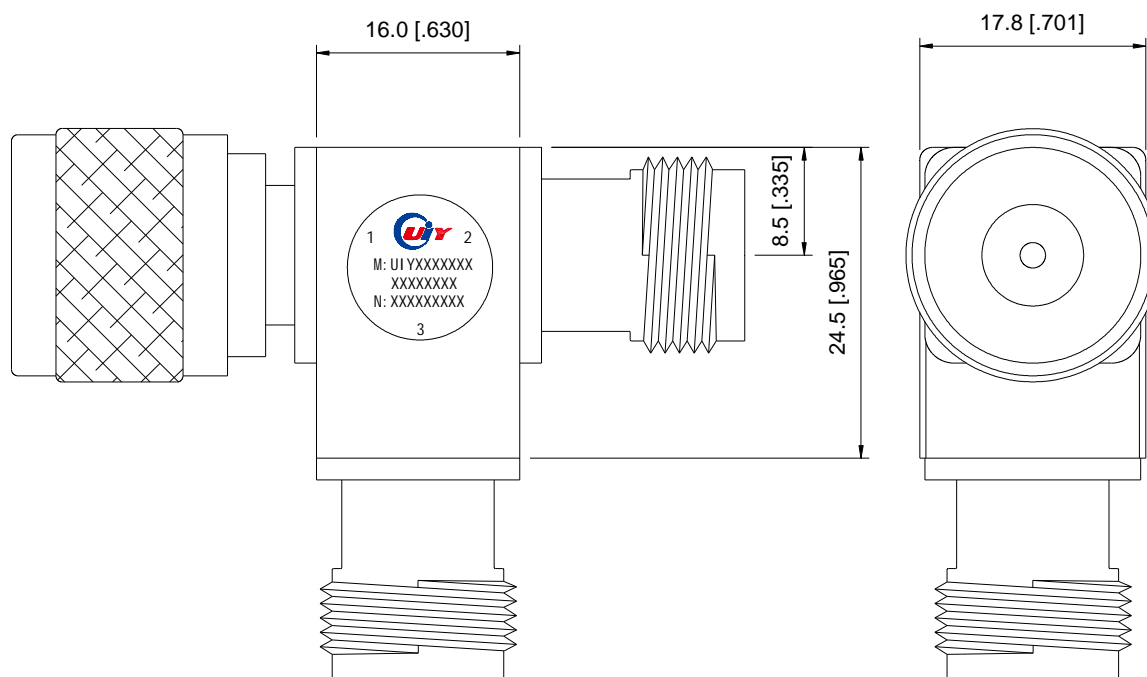

Unit: mm/ inch, General part tolerance is ± 0.2 mm unless otherwise stated.

Ver. 5

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China.

Web: www.uiy.com

Tel: +86-755-83748888

+86-755-25999990

Fax: +86-755-25999959

E-mail: sales@uiy.com