

130 to 900MHz – 4 Port Dual Junction Coaxial Circulator

Design Features


- ◆ Can be dual junction or multiple for high isolation.
- ◆ Military, space and commercial applications.
- ◆ Support one year standard warranty.
- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.

RF Characteristics

Model Number	Freq. Range (MHz)	Insertion Loss (1-2 & 3-4) Max(dB)	Isolation (2-1 & 4-3) Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYCDC11256A4P145T150SF	136 ~ 150	1.0	36	1.3	100	100	SMA-F	-10 ~ +60
UIYCDC11256A4P150T155NF	150 ~ 155	1.0	40	1.25	300	300	N-F	-10 ~ +70
UIYCDC11256A4P150T170SF	150 ~ 170	1.2	36	1.3	100	100	SMA-F	-10 ~ +70
UIYCDC11256A4P168T171SF	168 ~ 171	0.8	46	1.2	100	100	SMA-F	-30 ~ +70
UIYCDC11256A4P170T200NF	170 ~ 200	1.4	36	1.3	300	300	N-F	-30 ~ +70
UIYCDC11256A4P180T220SF	180 ~ 220	1.0	36	1.3	100	100	SMA-F	-30 ~ +70
UIYCDC11256A4P192T232SF	192 ~ 232	0.8	40	1.25	100	100	SMA-F	-30 ~ +70
UIYCDC11256A4P1975T2075S MTSFTSFTSF	197.5~207.5	0.8	46	1.2	100	100	SMA-M@ Port 1 SMA-F @Other	-30 ~ +70
UIYCDC11256A4P200T250SF	200 ~ 250	1.2	40	1.25	100	100	SMA-F	-30 ~ +70
UIYCDC11256A4P230T250NF	230 ~ 250	0.6	46	1.2	300	300	N-F	-30 ~ +70
UIYCDC11256A4P250T300SF	250 ~ 300	0.8	40	1.25	100	100	SMA-F	-30 ~ +70
UIYCDC11256A4P500T750SF	500 ~ 750	1.0	32	1.4	100	100	SMA-F	-30 ~ +70
UIYCDC11256A4P600T900SF	600 ~ 900	1.0	34	1.35	100	100	SMA-F	-30 ~ +70

- ² Listed are specific frequency ranges and tailor-made ranges are available.
- ² Please provide the information below when inquiring and mark * is required.
- * 1. The specific frequency ranges
 - * 2. Power handling (Forward, Reverse, Peak, etc.)
 - * 3. Connect type (SMA Male/ Female, N Male/ Female, etc.)
 - * 4. Other special requests (Insertion Loss, Isolation, VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

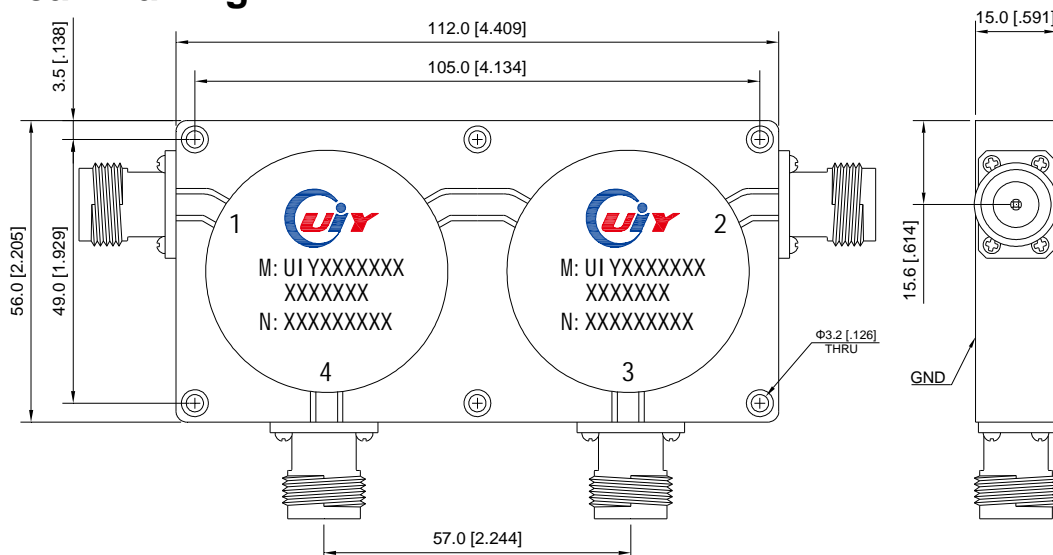

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5.1