

# 700 to 2000MHz – Dual Junction Coaxial Circulator

## Design Features


- ◆ Can be dual junction or multiple for high isolation.
- ◆ Military, space and commercial applications.
- ◆ Support one year standard warranty.
- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.

## RF Characteristics

Model Number	Freq. Range (MHz)	Insertion Loss (1-2) Max(dB)	Isolation (2-1) Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYCDC6834A700T900SF	700 ~ 900	0.8	36	1.3	100	100	SMA-F	-30 ~ +70
UIYCDC6834A800T1000NF	800 ~ 1000	0.8	40	1.25	100	100	N-F	-30 ~ +70
UIYCDC6834A805T870NF	805 ~ 870	0.6	45	1.2	200	200	N-F	-40 ~ +85
UIYCDC6834A850T1150SMTSFTSF	850 ~ 1150	1.2	36	1.3	100	100	SMA-M to SMA-F to SMA-F	-30 ~ +70
UIYCDC6834A860T960SF	860 ~ 960	0.6	45	1.2	100	100	SMA-F	-40 ~ +85
UIYCDC6834A900T1200SF	900 ~ 1200	1.0	40	1.25	100	100	SMA-F	-30 ~ +70
UIYCDC6834A900T1300SF	900 ~ 1300	1.2	36	1.3	100	100	SMA-F	-30 ~ +70
UIYCDC6834A950T1415SF	950 ~ 1415	1.2	36	1.4	100	100	SMA-F	0 ~ +60
UIYCDC6834A950T1450SF	950 ~ 1450	1.2	32	1.4	100	100	SMA-F	0 ~ +60
UIYCDC6834A960T1215NF	960 ~ 1215	0.8	40	1.25	200	200	N-F	-30 ~ +70
UIYCDC6834A1000T1500SF	1000 ~ 1500	1.2	36	1.4	200	200	SMA-F	0 ~ +60
UIYCDC6834A1225T1875SF	1225 ~ 1875	1.2	32	1.4	100	100	SMA-F	0 ~ +60
UIYCDC6834A1350T1850SF	1350 ~ 1850	1.0	36	1.3	100	100	SMA-F	0 ~ +60
UIYCDC6834A1290T1710SF	1290 ~ 1710	1.0	40	1.25	120	120	SMA-F	0 ~ +60
UIYCDC6834A1300T1740SF	1300 ~ 1740	1.0	40	1.25	100	100	SMA-F	0 ~ +60
UIYCDC6834A1300T1800SF	1300 ~ 1800	1.0	36	1.3	100	100	SMA-F	0 ~ +60
UIYCDC6834A1350T1850SF	1350 ~ 1850	1.0	36	1.3	100	100	SMA-F	0 ~ +60

- <sup>2</sup> Listed are specific frequency ranges and tailor-made ranges are available.
- <sup>2</sup> Please provide the information below when inquiring and mark \* is required.
- \* 1. The specific frequency ranges
  - \* 2. Power handling (Forward, Reverse, Peak, etc.)
  - \* 3. Connect type (SMA Male/ Female, N Male/ Female, etc.)
  - 4. Other special requests (Insertion Loss, Isolation, VSWR, Temperature, Dimension, etc.)

## Mechanical Drawing

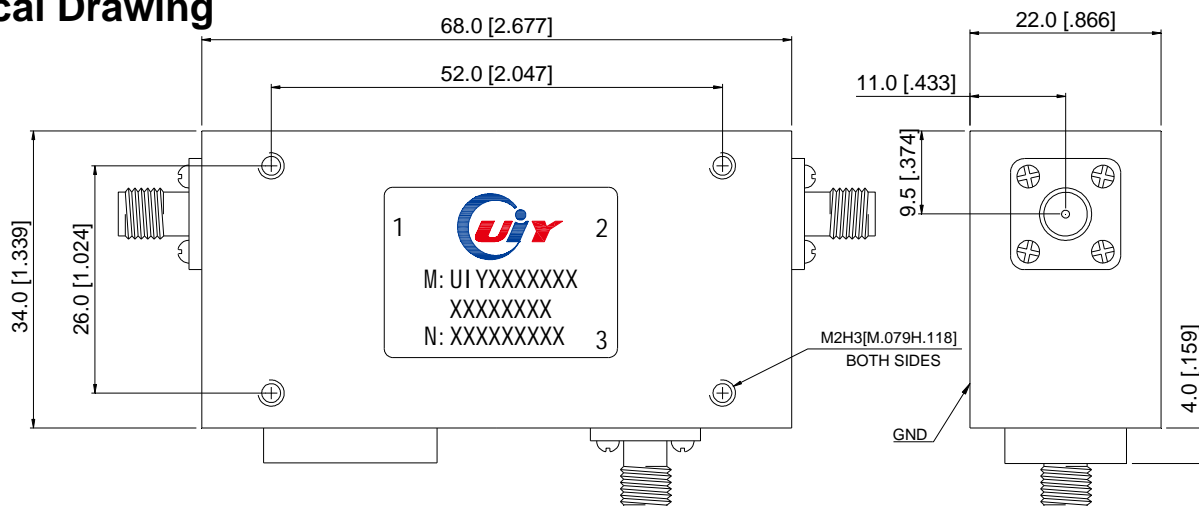

Unit: mm/ inch, General part tolerance is  $\pm 2\%$  unless otherwise stated.

Ver. 5