

250 to 1300MHz – 4 Port Dual Junction Coaxial Circulator


Design Features

- ◆ Can be dual junction or multiple for high isolation.
- ◆ Military, space and commercial applications.
- ◆ Support one year standard warranty.
- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.

RF Characteristics

Model Number	Freq. Range (MHz)	Insertion Loss (1-2 & 3-4) Max(dB)	Isolation (2-1 & 4-3) Min(dB)	VSWR Max	Forward Power (W)	Reverse Power (W)	Connector Type	Temp.(°C)
UIYCDC9648A4P300T350NF	300 ~ 350	0.6	45	1.2	400	400	N-F	-30 ~ +70
UIYCDC9648A4P350T400NF	350 ~ 400	0.6	45	1.2	400	400	N-F	-30 ~ +70
UIYCDC9648A4P350T500NF	350 ~ 500	1.2	32	1.4	100	100	N-F	-30 ~ +70
UIYCDC9648A4P380T470NF	380 ~ 470	0.7	40	1.25	300	300	N-F	-30 ~ +70
UIYCDC9648A4P400T470NF	400 ~ 470	0.6	45	1.2	400	400	N-F	-30 ~ +70
UIYCDC9648A4P400T430NF	400 ~ 430	0.5	50	1.15	400	400	N-F	-30 ~ +70
UIYCDC9648A4P440T470NF	440 ~ 470	0.5	50	1.15	400	400	N-F	-30 ~ +70
UIYCDC9648A4P440T470SF	440 ~ 470	0.5	50	1.15	100	100	SMA-F	-30 ~ +70
UIYCDC9648A4P470T570NF	470 ~ 570	0.8	40	1.25	400	400	N-F	-30 ~ +70
UIYCDC9648A4P480T520NF	480 ~ 520	0.6	45	1.2	400	400	N-F	-30 ~ +70
UIYCDC9648A4P570T670NF	570 ~ 670	0.6	45	1.2	400	400	N-F	-30 ~ +70
UIYCDC9648A4P670T770NF	670 ~ 770	0.6	45	1.2	400	400	N-F	-30 ~ +70
UIYCDC9648A4P700T1000NF	700 ~ 1000	1.2	36	1.3	400	400	N-F	-30 ~ +70
UIYCDC9648A4P1200T1300NF	1200 ~ 1300	0.5	45	1.2	400	400	N-F	-30 ~ +70

Mechanical Drawing

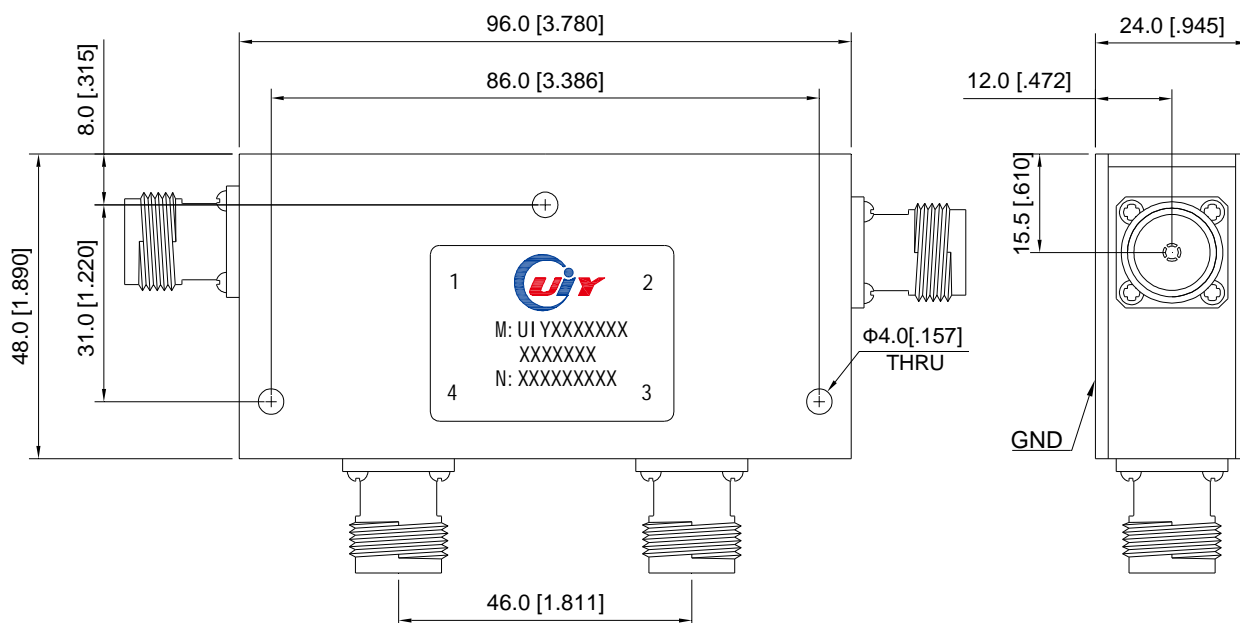

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5.1