

## 7 to 10GHz – Coaxial Isolator

### Design Features

- ◆ Can be dual junction even three for high isolation.
- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

### RF Characteristics


Model Number	Freq. Range (GHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYCI1624A74T77NF	7.4 ~ 7.7	0.3	23	1.2	60	10	N-F	-40 ~ +85
UIYCI1624A79T84NMTNF	7.9 ~ 8.4	0.3	23	1.2	60	10	N-M to N-F	-40 ~ +85
UIYCI1624A8T9NF	8.0 ~ 9.0	0.4	20	1.2	60	10	N-F	-40 ~ +85
UIYCI1624A93T97NMTNF	9.3 ~ 9.7	0.3	23	1.2	60	10	N-M to N-F	-40 ~ +85
UIYCI1624A95T10NF	9.5 ~ 10.0	0.3	23	1.2	60	10	N-F	-40 ~ +85

<sup>2</sup> List are specify frequency range and other ranges available.

<sup>2</sup> Please enter below information when inquiry and mark \* is must.

- \* 1. The specific frequency range
- \* 2. Power handling (Forward, Reverse, Peak, etc.)
- \* 3. Connect type (SMA Male/ Female, N Male/ Female, etc.)
- 4. Other special request if have (Insertion Loss, Isolation, VSWR, Temperature, Dimension, etc.)

### Mechanical Drawing

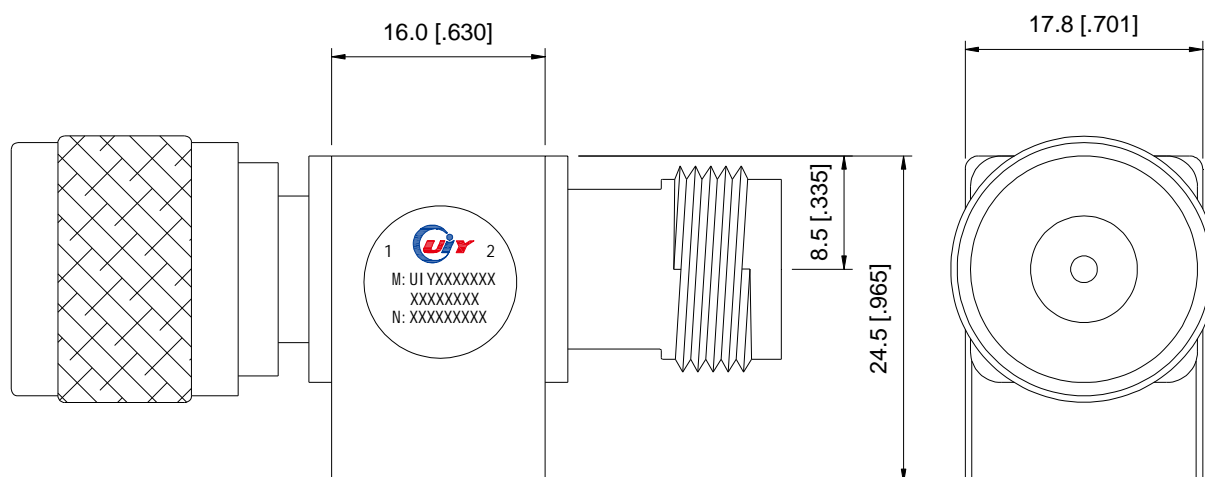

Unit: mm/ inch, General part tolerance is  $\pm 0.2$ mm unless otherwise stated.

Ver. 5

3/F, No 9, Xiangyin Rd, Longgang District, Shenzhen 518116, China.

Web: [www.uiy.com](http://www.uiy.com)

Tel: +86-755-25999990 +86-755-25999909

Fax: +86-755-25999959

E-mail: [sales@uiy.com](mailto:sales@uiy.com)