

250 to 1500MHz – Coaxial Isolator

Design Features

- ◆ Can be dual junction even three for high isolation.
- ◆ Military, space and commercial applications.
- ◆ Guaranteed for one year standard.
- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.

RF Characteristics

Model Number	Freq. Range (MHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYCI4580A250T260NF	250 ~ 260	0.6	20	1.25	300	100	N-F	-30 ~ +70
UIYCI4580A289T359NF	289 ~ 359	0.5	20	1.25	300	100	N-F	-30 ~ +70
UIYCI4580A300T330NF	300 ~ 330	0.4	20	1.25	300	250	N-F	-30 ~ +70
UIYCI4580A300T400SF	300 ~ 400	0.7	18	1.3	100	100	SMA-F	-30 ~ +70
UIYCI4580A350T400SF	350 ~ 400	0.35	23	1.2	100	100	SMA-F	-30 ~ +70
UIYCI4580A350T500SF	350 ~ 500	0.6	16	1.4	100	100	SMA-F	-20 ~ +60
UIYCI4580A400T430NF	400 ~ 430	0.25	25	1.15	300	100	N-F	-30 ~ +70
UIYCI4580A400T500NF	400 ~ 500	0.35	20	1.25	300	100	N-F	-30 ~ +70
UIYCI4580A400T512SF	400 ~ 512	0.5	20	1.25	300	100	N-F	-30 ~ +70
UIYCI4580A440T470SF	440 ~ 470	0.25	25	1.15	100	100	SMA-F	-30 ~ +70
UIYCI4580A440T470NF	440 ~ 470	0.25	25	1.15	300	250	N-F	-30 ~ +70
UIYCI4580A450T600SF	450 ~ 600	0.5	18	1.3	100	100	SMA-F	-30 ~ +70
UIYCI4580A470T650NF	470 ~ 650	0.6	18	1.3	300	100	N-F	-30 ~ +70
UIYCI4580A500T700NF	500 ~ 700	0.5	18	1.3	300	100	N-F	-30 ~ +70
UIYCI4580A690T1000SF	690 ~ 1000	0.6	18	1.3	100	100	SMA-F	-30 ~ +70
UIYCI4580A700T1000SF	700 ~ 1000	0.6	18	1.3	100	100	SMA-F	-30 ~ +70
UIYCI4580A850T1150SMTSF	850 ~ 1150	0.5	20	1.25	100	100	SMA-M to SMA-F	-30 ~ +70
UIYCI4580A1000T1100NF	1000 ~ 1100	0.3	23	1.2	400	250	N-F	-30 ~ +70
UIYCI4580A1200T1300NMTNF	1200 ~ 1300	0.3	23	1.2	400	250	N-M to N-F	-30 ~ +70

² List are specify frequency range and other ranges available.


² Please enter below information when inquiry and mark * is must.

* 1. The specific frequency range

* 2. Power handling (Forward, Reverse, Peak, etc.)

* 3. Other special request if have (Insertion Loss, Isolation, VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

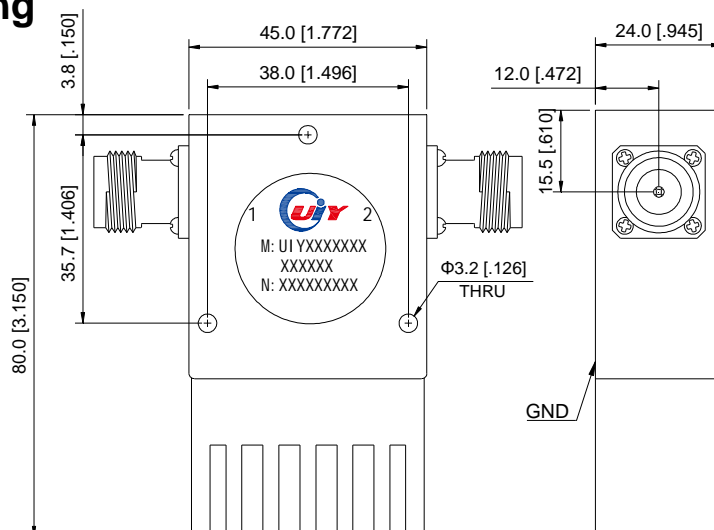

Unit: mm/ inch, General part tolerance is ±0.2mm unless otherwise stated.

Ver. 5