



10W 18GHz – Coaxial Termination

Design Features

- High RF performance, ultra-competitive price.
- Military, space and commercial applications.
- Custom design available upon request.
- Support one year standard warranty.


RF Characteristics

Model Number	Freq. Range	Power	VSWR Max	Connector Type	Impedance
UIYCT10AS124	DC-12.4GHz	10W	1.2	SMA Male	50 Ω
UIYCT10ASF124	DC-12.4GHz	10W	1.2	SMA Female	50 Ω
UIYCT10AS18	DC-18GHz	10W	1.25	SMA Male	50 Ω
UIYCT10ASF18	DC-18GHz	10W	1.25	SMA Female	50 Ω
 Listed are specific frequency ranges and tailor-made ranges available. Please provide the information below when inquiring and mark * is required. * 1. Power bandling 					

* 1. Power handling

- 2. Connect type (SMA Male/ Female, N Male/ Female, etc.)
- 3. Other special requests (VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

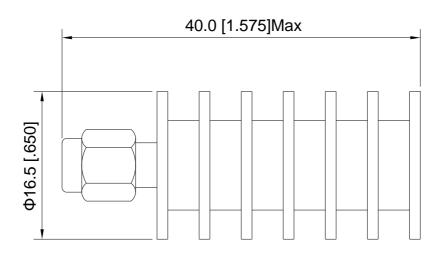

Unit: mm/ inch, General part tolerance is \pm 2% unless otherwise stated.

Web: www.uiy.com E-mail: sales@uiy.com