



200W - 18GHz Coaxial Termination

Design Features

- ♦ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- Custom design available upon request.
- Support one year standard warranty.


RF Characteristics

Model Number	Freq. Range	Power	VSWR Max	Connector Type	Impedance
UIYCT200AN8	DC-8GHz	200W	1.25	N Male	50 Ω
UIYCT200ANF8		200W	1.25	N Female	50 Ω
UIYCT200AN124	DC-12.4GHz	200W	1.35	N Male	50 Ω
UIYCT200ANF124		200W	1.35	N Female	50 Ω
UIYCT200AN18	DC-18GHz	200W	1.45	N Male	50 Ω
UIYCT200ANF18		200W	1.45	N Female	50 Ω

² Listed are specific frequency ranges and tailor-made ranges available.

- 2. Connect type (SMA Male/ Female, N Male/ Female, etc.)
- 3. Other special requests (VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

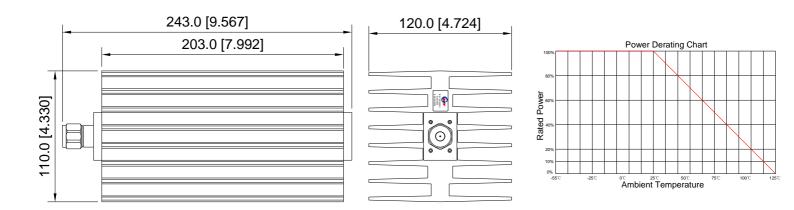

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5.0

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China. Tel: +86-755-83748888 +86-755-25999990 Fax: +86-755-25999959

Web: <u>www.uiy.com</u> E-mail: <u>sales@uiy.com</u>

Please provide the information below when inquiring and mark * is required.

^{* 1.} Power handling