

25W 18GHz – Coaxial Termination

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Freq. Range	VSWR Max	Power	Connector Type	Impedance
UIYCT25AS8	DC-8GHz	1.25	25W	SMA Male	50 Ω
UIYCT25AS124	DC-12.4GHz	1.3	25W	SMA Male	50 Ω
UIYCT25ASF124	DC-12.4GHz	1.3	25W	SMA Female	50 Ω
UIYCT25AS18	DC-18GHz	1.35	25W	SMA Male	50 Ω
UIYCT25ASF18	DC-18GHz	1.35	25W	SMA Female	50 Ω

- 2 Listed are specific frequency ranges and tailor-made ranges available.
 2 Please provide the information below when inquiring and mark * is required.
 * 1. Power handling
 2. Connect type (SMA Male/ Female, N Male/ Female, etc.)
 3. Other special requests (VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

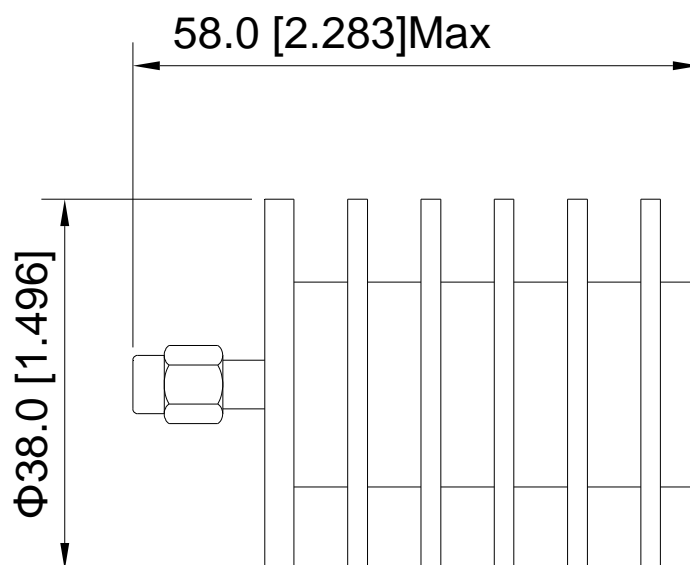

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5.0

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China.

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

Web: www.uiy.com

E-mail: sales@uiy.com